

DIGITAL
VERSION

2020

EST.
1988



CBC
FASTENERS

PROUDLY HOLDING INDUSTRY TOGETHER

TECHNICAL DATA

 Krugersdorp | Jetpark | Durban

 011 767 0000

 www.cbc.co.za

ISO 9001:2015
MANAGEMENT SYSTEM

MSECB
CERTIFIED





CBC
FASTENERS

PROUDLY HOLDING INDUSTRY TOGETHER

Disclaimer

Although CBC Fasteners has striven to ensure that all the information contained in this publication is accurate, reliance of the contents thereof, for any purpose whatsoever, is at the sole risk of that person or party. CBC is not responsible for any harm or damages caused to persons or property arising from use of any of the information contained herein.

Factory Overview - Bolt Production Plan	1
Factory Overview - Process Control	2
CBC Fastener's SABS Certificate of Registration	3

Mechanical Properties

Mechanical Properties, Proof Loads and Torque	4
Tightening Torque for Standard Metric Fasteners	5
Preload and Tightening for High Strength Structural Bolting	6
Hot Dip Galvanizing Specification for Bolts and Nuts	7

Dimensions for Commercial and High Tensile Products

Metric Hexagon Head Bolts

- DIN 931	(SABS 136)	9
- ISO 4014		10
- DIN 960	(DIN 931 Fine Pitch)	11
- ISO 8765	(ISO 4014 Fine Pitch)	12
- SABS 135	(Modified DIN 601)	13
- ISO 4016		14
- EN 14399-3	(SABS 1282) UK & France	15
- EN 14399-4	(DIN 6914) Germany	16

Metric Hexagon Head Screws

- DIN 933	(SABS 136)	17
- ISO 4017		18
- DIN 961	(DIN 933 Fine Pitch)	19
- ISO 8676	(ISO 4017 Fine Pitch)	20
- DIN 558		22
- ISO 4018		22


Metric Round Head Bolts

- Cup Ovals	(SABS 916)	23
- Cup Squares	(SABS 1143)	24
- Nib Bolts	(SABS 1143)	25
- Square Neck Bolts	(SABS 1143)	26

Metric Hexagon Nuts

- DIN 934		27
- ISO 4032		29
- EN 14399-3	(SABS 1282) UK & France	29
- EN 14399-4	(DIN 6915) Germany	30
- DIN 126	Washers	31

BOLT PRODUCTION

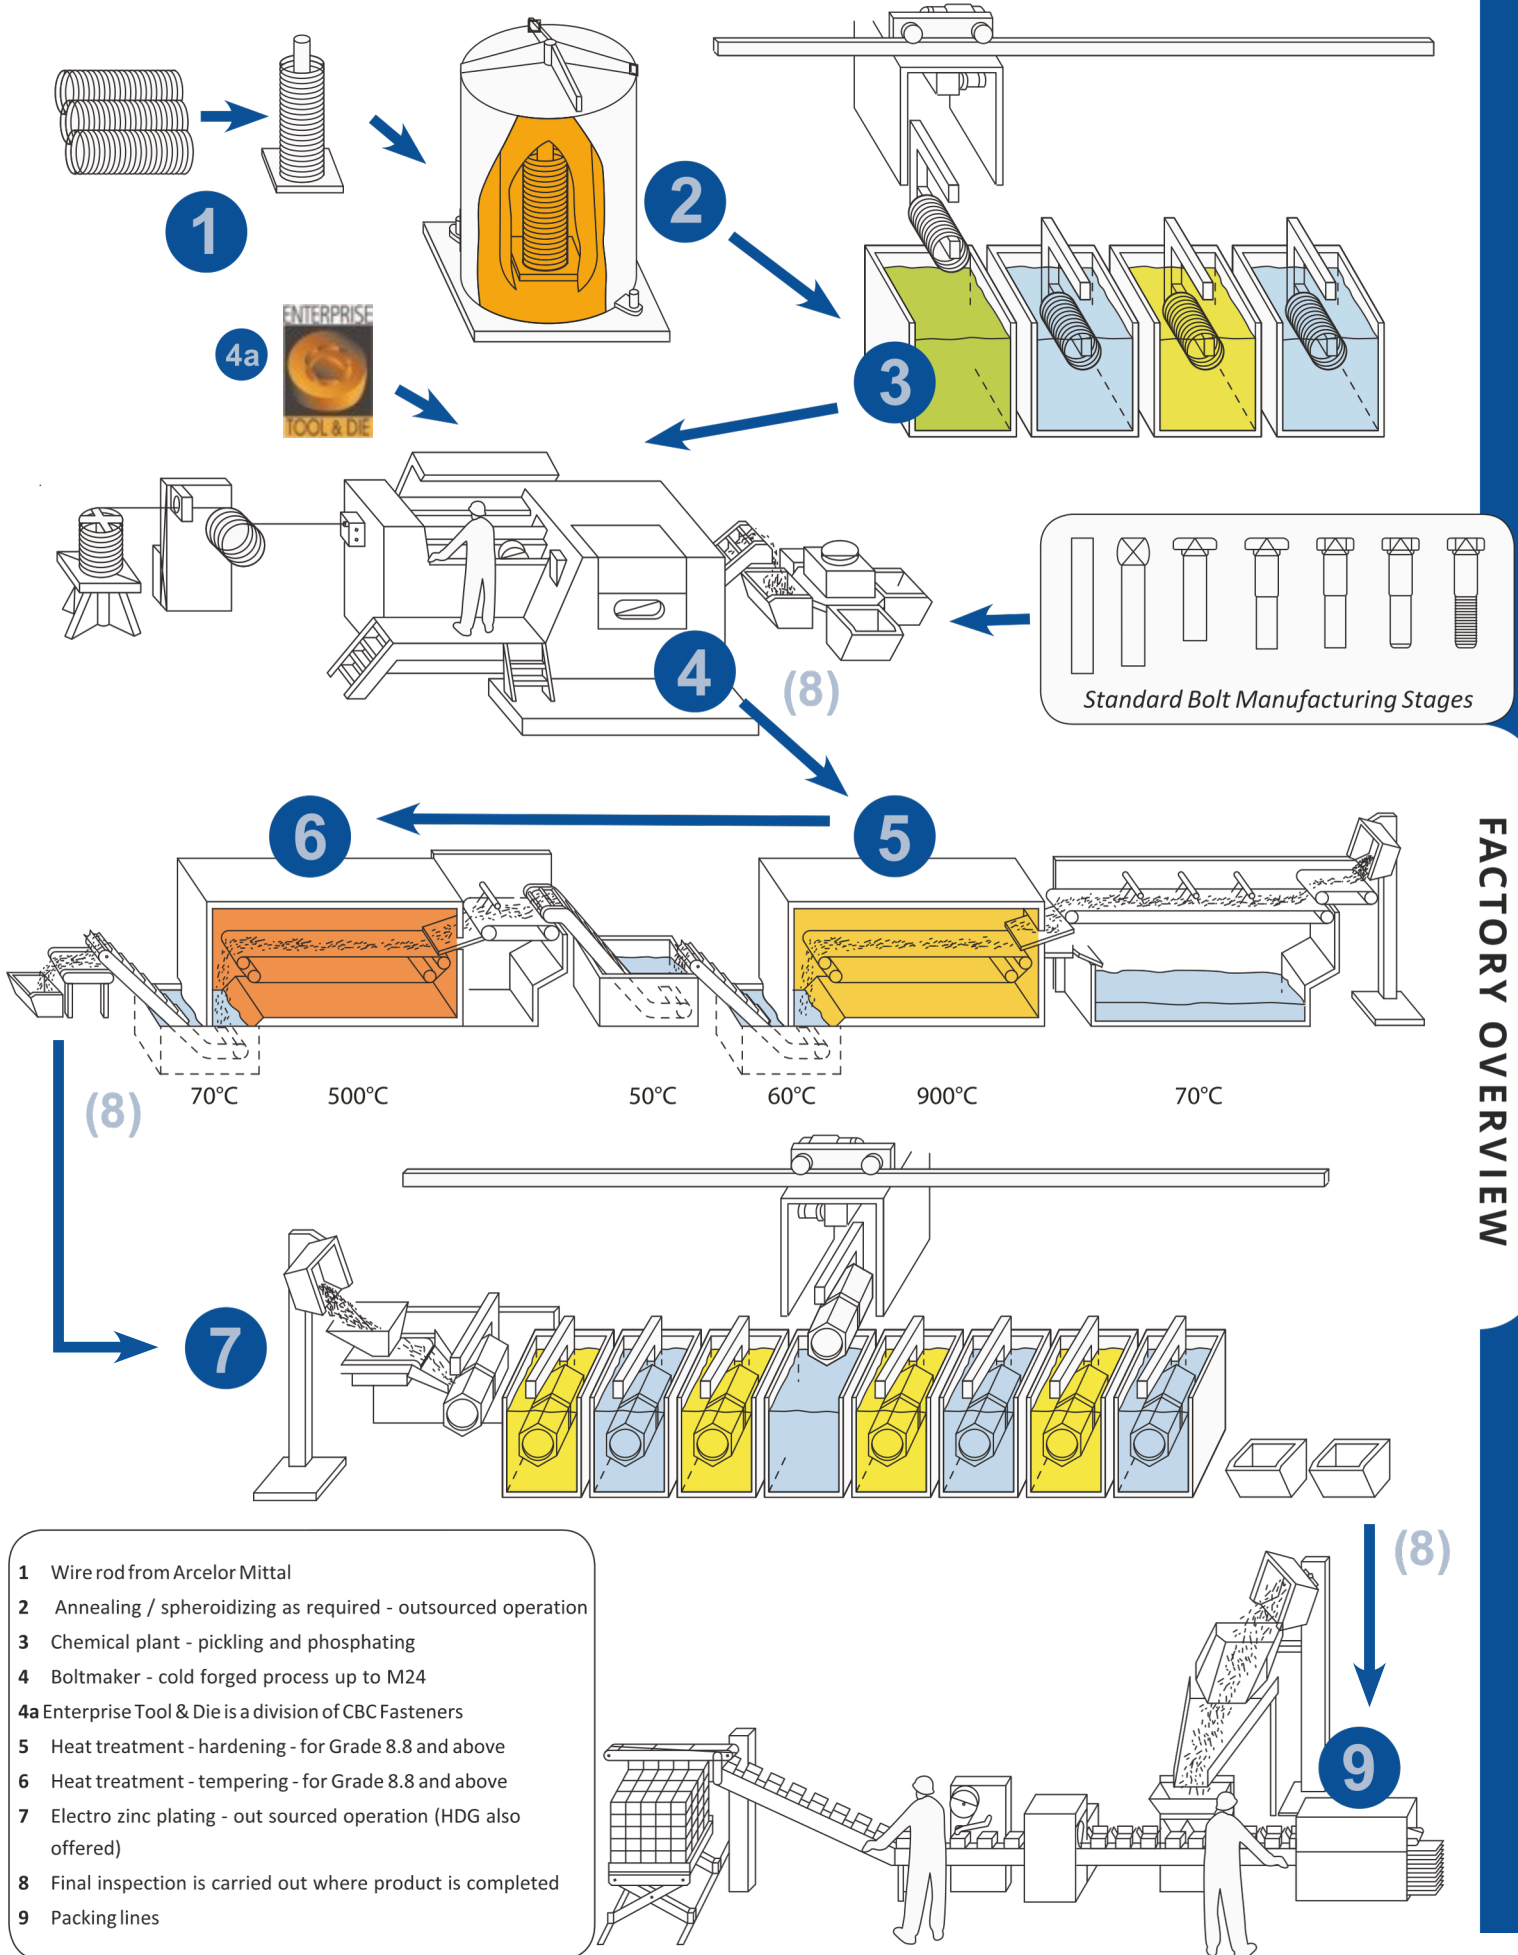

CBC FASTENERS (PTY) LTD – PROCESS

No		Test / Inspection	Inspection Equipment	Sampling Size	Inspection Responsibility	Non Conformance
1 2	Steel (Coils) delivered from Arcelor Mittal and Harchris after heat treatment	Dimensional verification Cast No Tensile test verification Surface defects Colour coding	Micrometer ensile machine Magnifying equipment	Samples per cast, If non-conformance, check whole consignment	Metallurgical Laboratory Personnel	If non-conformance, isolate to holding bay Enerate NCR for ArcelorMittal or Harchris Heat Treatment
3	Steel surface preparation at pickling plant	Pickling time control Thickness of zinc-phosphate testing Chemicals are controlled in bath / acid with inhibitor for hydrogen prevention	Scratch test Laboratory equipment	Everyday chemical control Scratch test each coil	Plant operator Metallurgical Laboratory Personnel	If non-conformance, isolate coils for re-work NCR generated
4	Forging & Thread Rolling/Tapping	First off samples Verification of dimensions (work pack) Quality Control in process	Micrometers Verniers Gauges Visual surface inspection	Operator at all times Patrol Quality Inspector every 15 minutes At least 10 samples per bin	Machine Operator Quality Inspector	If non-conformance, isolate and generate NCR Can be re-worked or scrapped
5 6	Heat Treatment for certain products is required plus rust prevention	Hardness Tensile Visual check for blackening & lubrication for rust prevention	Hardness tester Tensile machine	Hardness every 15 minutes Tensile test 3 samples per bin	Plant Operator & Assistant Quality Inspector	If non-conformance, isolate product and generate NCR for re-work or scrap
7	Electro Plating Hot Dip Galvanising (done by sub-contractors audited by CBC Fasteners(Pty) Ltd	Work instruction Thickness of plating Visual inspection for surface integrity Delivery notes Plating certificates and salt spray test	Alcometer for thickness verification Verniers Micrometers Magnifying equipment	10 Samples for bin @ CBC Fasteners At the platers, as per internal instructions or as per customer requirements	Quality Department In coming Inspector	If non-conformance, isolate product and generate NCR for re-work or scrap.
8	Final Inspection & Certification as per EN 10204 standard requirement Special tests if required	Dimensions (as per Standard requirement) Hardness Tensile Additional as per customer contract requirements	Verniers Micrometers Hardness testers Tensile machines Metrology (Microscopic) Structure Decarburization Gauges	10 per bin. Inspector performing ongoing testing product and verifying parameters Customer contract requirement	Metallurgical Laboratory Personnel Quality Control Inspectors	If non-conformance, isolate product and generate NCR Re-worker Scrap
9.1	Transfer for packing and storing Packing activities	Transfer documentation All information is captured into the computer system	Verniers Micrometer Gauges Packing Documentation & scale verification documentation	Ongoing visual Inspection measurement of dimensions	Supervision Table Leaders	If non-conformance, Generate NCR Isolate product
9.2	Product storage (as per computer system)	Location captured in computer system	Location Verification	Supervision location verification	Quality Inspector Store Personnel Pickers	If non-conformance, action is taken and the computer data is updated

CERTIFICATE

MSECB hereby certifies that the management system of

CBC Fasteners (Pty) Ltd.

6 Coppinger street, Krugersdorp, Gauteng, South Africa

Has been assessed and found to be in accordance
with the management system requirements in

ISO 9001:2015

Certification Scope:

Manufacturing , Importing and Distribution of Fasteners

Excluded Clauses: 8.3 and 8.5.3

IAF Code: 17

Certificate No. C411-QMS167-C3-05-24

Certified since 2018-05-21

Valid from 2024-05-08

Valid until 2027-05-20



Dren Krasniqi, Compliance Manager

**Subject to annual surveillance audits*

This certificate can be validated by email request at: info@msecb.com
www.msecb.com



MSECB
1555 boul de l'Avenir, Bureau 306
Laval, QC H7S 2N5, Canada
+1-844-426-7322

MECHANICAL PROPERTIES OF BOLTS, SCREWS AND STUDS – ISO 898

MECHANICAL PROPERTY			PROPERTY CLASS				
			4.8	8.8		10.9	12.9
				d≤16mm	d>16mm		
Tensile Strength (N/mm ²)	nom		400	800	800	1000	1200
	min		420	800	830	1040	1220
Rockwell Hardness, <i>HR</i>	min	HRB	71,0	-	-	-	-
		HRC	-	22	23	32	39
	max	HRB	99,5	-	-	-	-
		HRC	-	32	34	39	44
Lower Yield Stress(R _{eL} N/mm ²)	nom		320	-	-	-	-
	min		340	-	-	-	-
Proof Stress (Rp0,2 N/mm ²)	nom		-	640	640	900	1080
	min		-	640	640	940	1100
Elongation after Fracture, <i>A</i>	min		14	12	12	9	8

TORQUE/PROOF LOAD VALUES FOR PRODUCT WITH METRIC THREADS - ISO

	NUTS - PROOF LOAD					
FINISH →	BLACK				HDG	
	DIN 934		ISO 4032		DIN 934	
THREAD ↓	8	10	8	10	8	10
mm	N	N	N	N	N	N
M06	16000	20000	17200	20900	9510	13610
M08	29000	36500	31800	38100	18150	25980
M10	46000	58000	50500	60300	29500	42200
M12	67000	84000	74200	88500	43600	62300
M14	92000	115000	101200	120800	60300	86300
M16	126000	157000	138200	164900	83500	119000
M18	154000	192000	176600	203500	106000	147000
M20	196000	245000	225400	259700	136000	186000
M22	242000	303000	278800	321200	170000	236000
M24	282000	353000	324800	374600	197000	273000
M30	448000	561000	516100	594700	318000	440000

TIGHTENING TORQUE FOR STANDARD METRIC FASTENERS

The following table lists the maximum permissible tightening torques and resulting maximum pre-loads, for standard hex bolts based on 90% utilization of the bolt's yield strength point (elongation limit 0,2%), irrespective of grade.

The tightening torque does not include any safety factor and should be used with caution because the coefficient of friction μ is subject to many application variables. (See note examples below).

Coefficient of friction:

$\mu = 0.10$ for standard black bolts (light oiled) $\mu = 0.14$ for standard electro zinc plated bolts (dry)


PROPERTY CLASS BASED ON ISO 898/1									
Metric Threads	Friction Coefficient	Maximum Tightening Torque Nm				Maximum Preload kN			
		Gr 4.8	Gr 8.8	Gr 0.9	Gr 12.9	Gr 4.8	Gr 8.8	Gr 10.9	Gr 12.9
M06 X 1.0	0.10	4.1	9.0	13.2	15.4	4.84	10.40	15.30	17.90
	0.14	5.2	11.3	6.5	19.3	4.57	9.90	14.50	17.00
M08X1.25	0.10	10.0	21.6	31.8	37.2	8.80	19.10	28.00	32.80
	0.14	12.6	27.3	40.1	46.9	8.30	18.10	26.60	31.10
M10X1.5	0.10	20.1	43.0	63.0	73.0	14.10	30.30	44.50	52.10
	0.14	25.3	54.0	79.0	93.0	13.30	28.80	42.20	49.40
M12X1.75	0.10	34.0	73.0	108.0	126.0	20.50	44.10	64.80	75.90
	0.14	43.0	93.0	137.0	160.0	19.40	41.90	61.50	72.00
M14X2.0	0.10	55.0	117.0	172.0	201.0	28.20	60.60	88.90	104.10
	0.14	69.0	148.0	218.0	255.0	26.70	57.50	84.40	98.90
M16X2.0	0.10	84.0	180.0	264.0	309.0	38.60	82.90	121.70	142.40
	0.14	107.0	230.0	338.0	395.0	36.60	78.80	115.70	135.40
M20X2.5	0.10	164.0	363.0	517.0	605.0	60.30	134.00	190.00	223.00
	0.14	209.0	464.0	661.0	773.0	57.20	127.00	181.00	212.00
M24X3.0	0.10	282.0	625.0	890.0	1041.0	86.90	192.00	274.00	320.00
	0.14	359.0	798.0	1136.0	1329.0	82.40	183.00	260.00	305.00
M30X3.5	0.10	563.0	1246.0	1775.0	2077.0	138.70	307.00	437.00	511.00
	0.14	719.0	1597.0	2274.0	2662.0	131.70	292.00	416.00	487.00

SOURCE: Calculation procedure follows VDI guidelines 2230 (2003). VDI = Verein Deutscher Ingenieure, the Association of German Engineers.

NOTE: DIN 18800 Part 7 states, "The bolt may be tightened either by NUT or by the BOLT"

The friction values μ can show great variation because of influencing factors, such as the material pairing, the surface quality, the surface treatment (electroplated, hot dip galvanized, blackened etc.) and the type of lubrication (with or without oil, molybdenum, "molykote" paste, dry or wet, etc).

Examples of coefficients of friction for various finishes - μ					
Metallic, black tempered	0.14 – 0.24	Standard Black Oil	~ - 0.10	Plain steel black	0.20 +
Black Oxide Treatment	0.16 – 0.19	Hot dip galvanized	~ - 0.15	Wax	0.10 – 0.16
Weathered rusted, wire-brushed	~ - 0.35	Electroplated & oiled	~ - 0.10	M _o S ₂	0.10 – 0.16
Sand blast cleaned surface	~ - 0.50	Electroplated only	0.12 – 0.18		

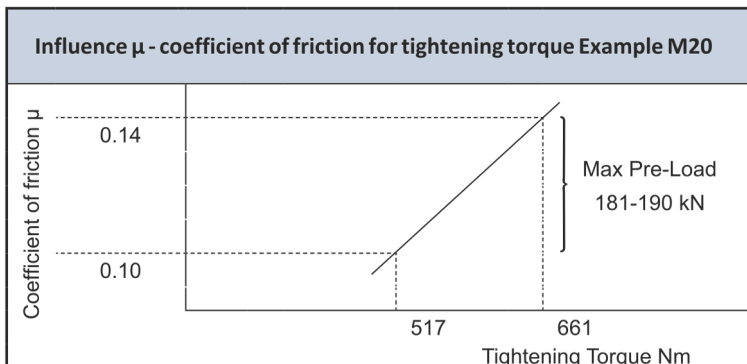

To achieve the suitable maximum preload:

- a higher value of coefficient of friction may require a higher tightening torque, and
- a lower value of coefficient of friction may require a lower tightening torque.

All tools used for tightening should be checked frequently and correctly calibrated following best practice procedures.

PRELOAD AND TIGHTENING FOR HIGH STRENGTH STRUCTURAL BOLTING ASSEMBLIES FOR PRELOADING (FRICTION BOLTS)

Methods used for control of bolt tightening

There are several methods that are available for controlling the desired level of pre-load in a fastener. The decision as to which method to use is dependant on the importance of the joint.

1. **Hand Operated Torque Wrenches** are often the most convenient and inexpensive tool for torquing a fastened joint. A manual torque wrench is easy to set and easy to use. When the specified setting is reached, the tool gives a visual/audible signal and the operator can proceed to the next fastener. The most important point to remember when using a manual torque wrench is to make sure that the instrument has been stored properly and has been calibrated by a independent, recognized torque consultant.

2. **Power Torque Wrenches** are more productive when large numbers of bolts are to be tightened. These tools require tightening of a sample of bolts in a bolt load measuring device in order to set the cut-off point for the desired tension, rather than measuring torque directly.

3. **Turn-of-Nut Method** involves first tightening the bolt to a “snug tight” condition, then marking the relative position of both bolt & nut. Finally the nut is rotated and fully tensioned with respect to the stationary bolt-head by a certain degree of rotation. This method is time consuming but more accurate than the above methods when performed by an experienced operator.

NOTE

Dimensioning, design and manufacture of fasteners with high-strength structural bolting are regulated in DIN 18800 and EN 14399. The tables below, which are taken from DIN 18800 part 7, shows the necessary pre-loads, torques and tightening angles for grade 10.9 / 10.

TORQUE PROCEDURES						
	Bolt diameter	Required preload in the bolt F_M	Hand operated torque wrench		Power torque wrench	Turn-of-nut
			Tightening torque to be applied M_A		Preload to be applied F_M	Pre-tightening torque to be applied M_A
			Lubricated with MoS2	Lightly oiled		
	mm	kN	Nm	Nm	kN	Nm
1	M12	50	100	120	60	10
2	M16	100	250	350	110	50
3	M20	160	450	600	175	50
4	M24	220	800	1100	240	100
5	M30	350	1650	2200	390	200
6	M36	510	2800	3800	560	200

ANGLE AND ROTATION PROCEDURE : TURN-OF-NUT METHOD								
Bolt Dia	Angle	Rotations	Angle	Rotations	Angle	Rotations	Angle	Rotations
M12–M22	180º	½	240º	¾	270º	¾	360º	1.
M24-M36							270º	¾
Clamping Length	lk ≤ 50		51 < lk ≤ 100		101 < lk ≤ 170		171 < lk ≤ 240	

The value M_A (tightening torque) depends upon the thread lubricant. The type of lubricant used has a definite effect on how much torque is needed to overcome friction. Common machine oil is considered to be a poor lubricant whilst Moly-disulphide is recommended.

All tools used for tightening should be checked frequently and correctly calibrated following best practice procedures.

HOT DIP GALVANIZING SPECIFICATION FOR BOLTS AND NUTS UP TO GRADE 8.8

Corrosion protection of carbon steel fasteners is generally achieved through the application of a coating (barrier protection), be it in the form of a paint system or through the use of a metallic coating. Metallic coatings comprise of different materials, zinc is usually chosen for reason of economics, ease of application as well as the mechanism of cathodic protection provided by zinc.

Zinc is applied either by an electroplating process (electro-galvanizing) or by immersion in molten zinc (hot dip galvanizing). Corrosion protection provided by zinc is generally proportional to the coating thickness, i.e. the thicker the coating the longer the service life.

Zinc coating thicknesses achieved using the electroplating process, generally range between 6µm to 10µm (µm = micrometers), while hot dip galvanized coating thicknesses range from 45µm through to about 65µm. It is therefore imperative to specify the specific type of zinc coating required for corrosion protection. The word “galvanized” alone is insufficient and should be avoided. Corrosion protection specifications should clearly state, “electroplated, or electro-galvanized” or “hot dip galvanized”.

The following specification is restricted to the requirements for Hot Dip Galvanized carbon steel fasteners, comprising bolts, nuts and washers.

From Grade 4.6 to Grade 8.8, fasteners shall be hot dip galvanized by the centrifuging process. The coating shall conform to the thicknesses listed in table No.1.

Table No. 1 - Coating thicknesses on samples that are centrifuged (Refer ISO 1461:2000)

Fastener diameter	Local coating thickness (minimum) Note: A µm or gms/m ²	Mean coating thickness (minimum) Note: B µm or gms/m ²
≥ 20 mm diameter	45 or 325	55 or 395
≥ 6 mm to < 20 mm diameter	35 or 250	45 or 325
< 6 mm diameter	20 or 175	25 or 200

NOTE:

- Local coating thickness obtained using a magnetic test or preferred single value from a gravimetric test.
- Mean coating thickness being the average value of the local thicknesses on all the articles in the control sample.
- Hot dip galvanized fasteners not commercially available in sizes <6mm diameter.

Enlarge Tapping Allowance for Hot Dip Galvanized Nuts

The zinc coating on external threads shall be free from lumps and shall not have been subjected to a cutting, rolling or finishing operation that could damage the zinc coating. Hot dip galvanized nuts shall be processed as “blanks” and the oversized internal threads shall be cut after the zinc coating process in accordance with the allowances given in table No.3. Alternatively, under cutting of the bolt threads prior to hot dip galvanizing is permissible.

Table No.3 – Enlarge tapping allowance

Nominal size of thread	Allowance (mm)
M8 to M12	0.33
M16 to M24	0.38
> M24	0.40

Reference Specifications

SANS 121 (ISO 1461)

Hot dip galvanized coatings on fabricated iron and steel articles.


SANS 10094

The use of high-strength friction-grip bolts.

SANS 10684

Hot dip galvanised coating for structural fasteners

METRIC HEXAGON HEAD BOLTS

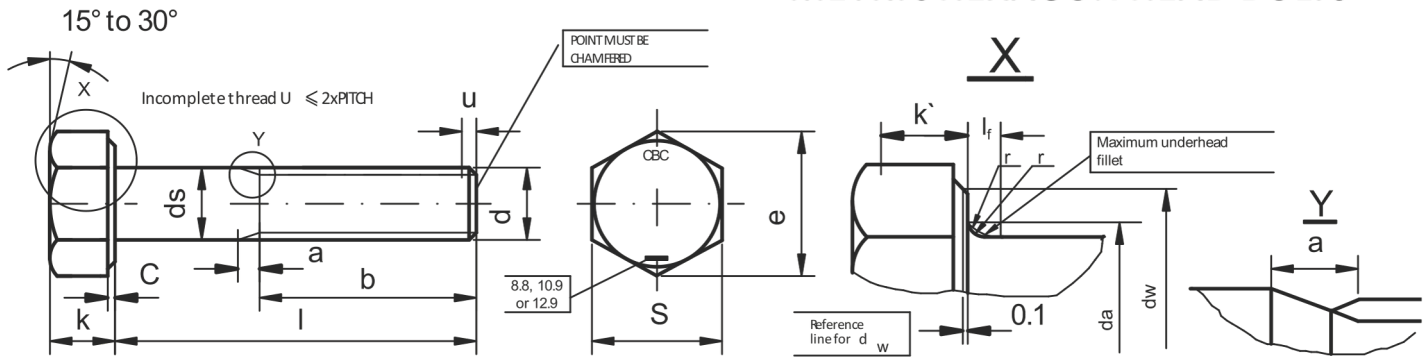

Dimensions for Bolt DIN 931 9SABS 136)

Grade 8.8, 10.9 and 12.9
Range M6 - M30

Dimensions in millimetres

✦ Specifications differences between
DIN 931 and ISO 4014

NOTE This specification has been superseded
by ISO 4014. However, market preference
dictates the continued use of this specification.


d	S		k		
	min	max	min	nom	max
M6	9.78	10.00	3.85	4.00	4.15
M8	12.73	13.00	5.15	5.30	5.45
M10	✦ 16.73	✦ 17.00	6.22	6.40	6.58
M12	✦ 18.67	✦ 19.00	7.32	7.50	7.68
M14	✦ 21.67	✦ 22.00	8.62	8.80	8.98
M16	23.67	24.00	9.82	10.00	10.18
M18	26.67	27.00	11.28	11.50	11.72
M20	29.67	30.00	12.29	12.50	12.71
M22	✦ 31.61	✦ 32.00	13.78	14.00	14.22
M24	35.38	36.00	14.79	15.00	15.21
M30	45.38	46.00	18.44	18.70	18.96

	ds (shank)		P	a	C		e	r	l _f	U	da	dw	k'
	min	max	pitch	min	min	max	min	min	max	max	max	min	min
M6	5.82	6.00	1.00	2.0	0.15	0.50	11.05	0.25	1.4	1.5	6.8	8.88	2.70
M8	7.78	8.00	1.25	2.5	0.15	0.60	14.38	0.40	2.0	1.8	9.2	11.63	3.61
M10	9.78	10.00	1.50	3.5	0.15	0.60	✦ 18.90	0.40	2.0	2.2	11.2	✦ 15.63	4.35
M12	11.73	12.00	1.75	4.0	0.15	0.60	✦ 21.10	0.60	3.0	2.6	13.7	✦ 17.37	5.12
M14	13.73	14.00	2.00	4.5	0.15	0.60	✦ 24.49	0.60	3.0	3.0	15.7	✦ 20.50	6.03
M16	15.73	16.00	2.00	5.0	0.20	0.80	26.75	0.60	3.0	3.0	17.7	22.49	6.87
M18	17.73	18.00	2.50	5.0	0.20	0.80	30.14	0.60	3.0	3.0	20.2	25.30	7.80
M20	19.67	20.00	2.50	7.0	0.20	0.80	33.53	0.80	4.0	3.5	22.4	28.19	8.60
M22	21.67	22.00	2.50	7.0	0.20	0.80	✦ 35.72	0.80	4.0	3.5	24.4	✦ 30.00	9.60
M24	23.67	24.00	3.00	8.0	0.20	0.80	39.98	0.80	4.0	4.5	26.4	33.61	10.35
M30	29.67	30.00	3.50	8.0	0.20	0.80	50.85	1.00	6.0	5.2	33.4	42.75	12.80

	l _{mm}	25	30	35	40	45	50	55	60	65	70	75	80	90-120	130-160	170-200	210-280
		± 0.42												± 0.70	± 0.80		± 0.92
M6	b																
M8	b																
M10	b																
M12	b																
M14	b																
M16	b																
M18	b																
M20	b																
M22	b																
M24	b																
M30	b																

Not available in CBC Range Only available in full thread

METRIC HEXAGON HEAD BOLTS

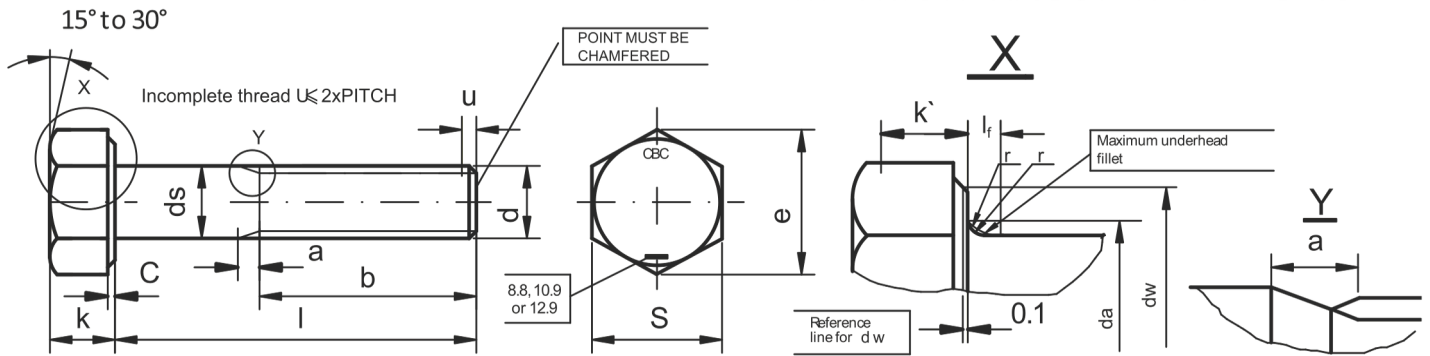

Dimensions for Bolt ISO 4014

Grade 8.8, 10.9 and 12.9
Range M6 - M30

Dimensions in millimetres

► Specifications differences between
DIN 931 and ISO 4014


d	S		k		
	min	max	min	nom	max
M6	9.78	10.00	3.85	4.00	4.15
M8	12.73	13.00	5.15	5.30	5.45
M10	► 15.73	► 16.00	6.22	6.40	6.58
M12	► 17.67	► 18.00	7.32	7.50	7.68
M14	► 20.67	► 21.00	8.62	8.80	8.98
M16	23.67	24.00	9.82	10.00	10.18
M18	26.67	27.00	11.28	11.50	12.72
M20	29.67	30.00	12.29	12.50	12.71
M22	► 33.38	► 34.00	13.78	14.00	14.22
M24	35.38	36.00	14.79	15.00	15.21
M30	45.38	46.00	18.44	18.70	18.96

	ds (shank)		P	a	C		e	r	l _f	U	da	dw	k'
	min	max	pitch	min	min	max	min	min	max	max	max	min	min
M6	5.82	6.00	1.00	2.0	0.15	0.50	11.05	0.25	1.4	1.5	6.8	8.88	2.70
M8	7.78	8.00	1.25	2.5	0.15	0.60	14.38	0.40	2.0	1.8	9.2	11.63	3.61
M10	9.78	10.00	1.50	3.5	0.15	0.60	► 17.77	0.40	2.0	2.2	11.2	► 14.63	4.35
M12	11.73	12.00	1.75	4.0	0.15	0.60	► 20.03	0.60	3.0	2.6	13.7	► 16.63	5.12
M14	13.73	14.00	2.00	4.5	0.15	0.60	► 23.36	0.60	3.0	3.0	15.7	► 19.37	6.03
M16	15.73	16.00	2.00	5.0	0.20	0.80	26.75	0.60	3.0	3.0	17.7	22.49	6.87
M18	17.73	18.00	2.50	5.0	0.20	0.80	30.14	0.60	3.0	3.0	20.2	25.30	7.90
M20	19.67	20.00	2.50	7.0	0.20	0.80	33.53	0.80	4.0	3.5	22.4	28.19	8.60
M22	21.67	22.00	2.50	7.0	0.20	0.80	► 37.72	0.80	4.0	3.5	24.4	► 31.70	9.60
M24	23.67	24.00	3.00	8.0	0.20	0.80	39.98	0.80	4.0	4.5	26.4	33.61	10.35
M30	29.67	30.00	3.50	8.0	0.20	0.80	50.85	1.00	6.0	5.2	33.4	42.75	12.80

	l _{mm}	25	30	35	40	45	50	55	60	65	70	75	80	90-120	130-160	170-200	210-280
		± 0.42			± 0.50				± 0.60					± 0.70	± 0.80		± 0.92
M6	b								18 + 2.0								
M8	b								22 + 2.5						28 + 2.5		
M10	b								26 + 3.0						32 + 3.0		45 + 3.0
M12	b								30 + 3.5						36 + 3.5		49 + 3.5
M14	b								34 + 4.0						40 + 4.0		
M16	b								38 + 4.0						44 + 4.0		
M18	b								42 + 5.0						48 + 5.0		
M20	b								46 + 5.0						52 + 5.0		
M22	b								50 + 5.0						56 + 5.0		
M24	b								54 + 6.0						60 + 6.0		
M30	b								66 + 7.0						72 + 7.0		

Not available in CBC Range Only available in full thread

METRIC HEXAGON HEAD BOLTS

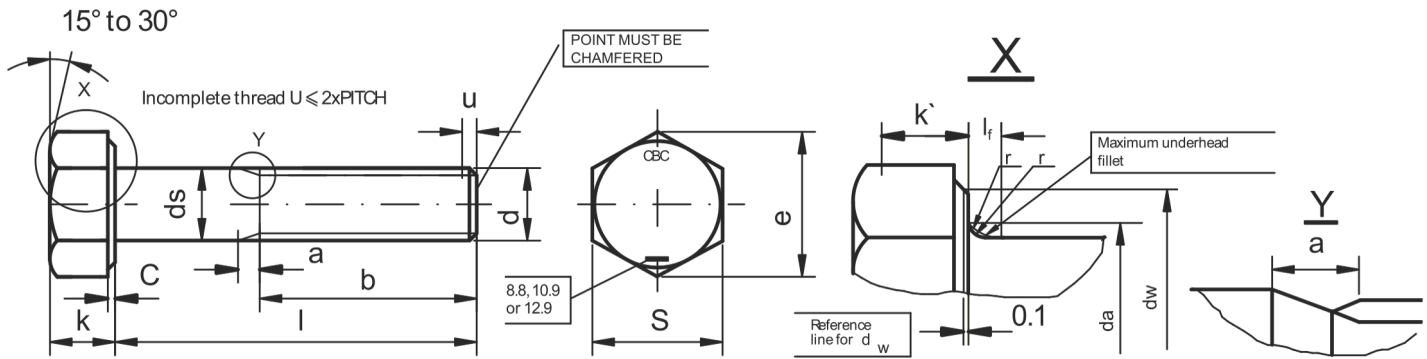

Dimensions for Bolt DIN 960

Grade 8.8, 10.9 and 12.9
Range M8 - M24

Dimensions in millimetres

NOTE This specification has been superseded by ISO 8765. However, market preference dictates the continued use of this specification.


d & pitch	S		k		
	min	max	min	nom	max
M8 x 1.00	12.73	13.00	5.15	5.30	5.45
M10 x 1.00 & 1.25	16.73	17.00	6.22	6.40	6.58
M12 x 1.25 & 1.50	18.67	19.00	7.32	7.50	7.68
M14 x 1.50	21.67	22.00	8.62	8.80	8.98
M16 x 1.50	23.67	24.00	9.82	10.00	10.18
M20 x 1.50 & 2.00	29.67	30.00	12.29	12.50	12.72
M24 x 1.50 & 2.00	35.38	36.00	14.79	15.00	15.22

	ds (shank)		a	C		e	r	l _f	U	da	dw	k'
	min	max	min	min	max	min	min	max	max	max	min	min
M8	7.78	8.00	2.5	0.15	0.60	14.38	0.4	2.0	1.8	9.2	11.63	3.61
M10	9.78	10.00	3.5	0.15	0.60	18.90	0.4	2.0	2.2	11.2	15.63	4.35
M12	11.73	12.00	4.0	0.15	0.60	21.10	0.6	3.0	2.6	13.7	17.37	5.12
M14	13.73	14.00	4.5	0.15	0.60	24.49	0.6	3.0	3.0	15.7	20.50	6.03
M16	15.73	16.00	5.0	0.20	0.80	26.75	0.6	3.0	3.0	17.7	22.49	6.87
M20	19.67	20.00	7.0	0.20	0.80	33.53	0.8	4.0	3.5	22.4	28.19	8.60
M24	23.67	24.00	8.0	0.20	0.80	39.98	0.8	4.0	4.5	26.4	33.61	10.35

	l mm	25	30	35	40	45	50	55	60	65	70	75	80	90-120	130-160	170-200	210-280	
		± 0.42	± 0.50				± 0.60					± 0.70	± 0.80		± 0.92			
M8	b		22 + 2.5												28 + 2.5			
M10	b		26 + 3.0												32 + 3.0		45 + 3.0	
M12	b		30 + 3.5												36 + 3.5		49 + 3.5	
M14	b		34 + 4.0												40 + 4.0			
M16	b		38 + 4.0												44 + 4.0			
M20	b		46 + 5.0												52 + 5.0			
M24	b		54 + 6.0												60 + 6.0			
Use full thread DIN 961																		

Not available in CBC Range Only available in full thread

METRIC HEXAGON HEAD BOLTS

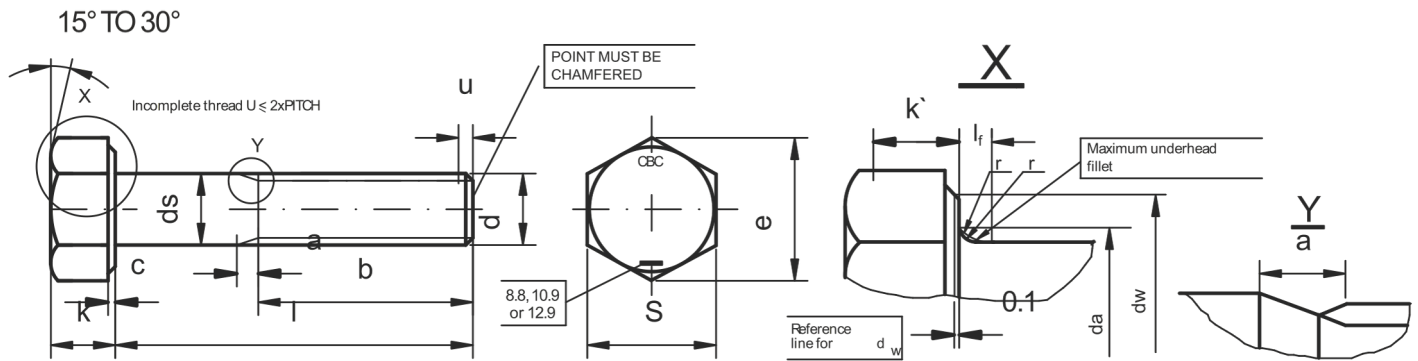

Dimensions for Bolt ISO 8765 (4014 Fine Pitch)

Grade 8.8, 10.9 and 12.9
Range M8 - M24

Dimensions in millimetres

d & pitch	S		k		
	min	max	min	nom	max
M8 x 1.00	12.73	13.00	5.15	5.30	5.45
M10 x 1.00 & 1.25	15.73	16.00	6.22	6.40	6.58
M12 x 1.25 & 1.50	17.73	18.00	7.32	7.50	7.68
M14 x 1.50	20.67	21.00	8.62	8.80	8.98
M16 x 1.50	23.67	24.00	9.82	10.00	10.18
M20 x 1.50 & 2.00	29.67	30.00	12.29	12.50	12.72
M24 x 1.50 & 2.00	35.38	36.00	14.79	15.00	15.22

	ds (shank)		a	C		e	r	l _f	U	da	dw	k'
	min	max	min	min	max	min	min	max	max	max	min	min
M8	7.78	8.00	2.5	0.15	0.60	14.38	0.4	2.0	1.8	9.2	11.63	3.61
M10	9.78	10.00	3.5	0.15	0.60	17.77	0.4	2.0	2.2	11.2	14.63	4.35
M12	11.73	12.00	4.0	0.15	0.60	20.03	0.6	3.0	2.6	13.7	16.63	5.12
M14	13.73	14.00	4.5	0.15	0.60	23.36	0.6	3.0	3.0	15.7	19.37	6.03
M16	15.73	16.00	5.0	0.20	0.80	26.75	0.6	3.0	3.0	17.7	22.49	6.87
M20	19.67	20.00	7.0	0.20	0.80	33.53	0.8	4.0	3.5	22.4	28.19	8.60
M24	23.67	24.00	8.0	0.20	0.80	39.98	0.8	4.0	4.5	26.4	33.61	10.35

	l mm	25	30	35	40	45	50	55	60	65	70	75	80	90-120	130-160	170-200	210-280
		± 0.42	± 0.50					± 0.60						± 0.70	± 0.80		± 0.92
M8	b	22 + 2.5													28 + 2.5		
M10	b	26 + 3.0													32 + 3.0		45 + 3.5
M12	b	30 + 3.5													36 + 3.5		49 + 3.5
M14	b	34 + 4.0													40 + 4.0		
M16	b	38 + 4.0													44 + 4.0		
M20	b	46 + 5.0													52 + 5.0		
M24	b	54 + 6.0													60 + 6.0		




Not available in CBC Range



Only available in full thread

METRIC HEXAGON HEAD BOLTS

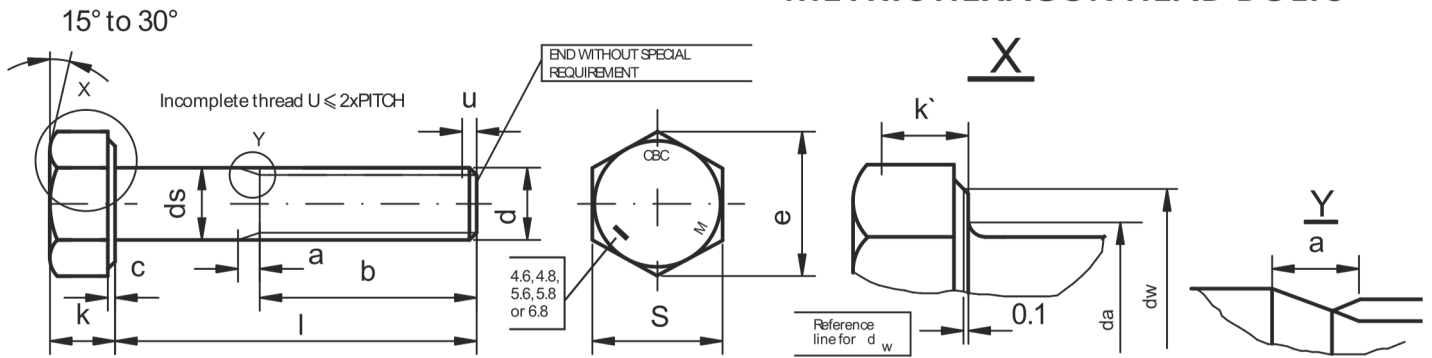

Dimensions for Bolt SABS 135 (DIN 601) (XOX)

Grade 4.6, 4.8, 5.6, 5.8 and 6.8

Range M6 - M30

Dimensions in millimetres

d	S		k		
	min	max	min	nom	max
M6	9.78	10.00	3.85	4.00	4.15
M8	12.73	13.00	5.15	5.30	5.45
M10	16.73	17.00	6.22	6.40	6.58
M12	18.67	19.00	7.32	7.50	7.68
M16	23.67	24.00	9.82	10.00	10.18
M20	29.67	30.00	12.29	12.50	12.71
M24	35.38	36.00	14.79	15.00	15.21
M30	45.00	46.00	18.44	18.70	18.96

	ds		P	a	C		e	r	U	da	dw	k'
	min	max	lead	max	min	max	min	min	max	max	min	min
M6	5.82	6.00	1.00	2.0	0.15	0.50	11.05	0.25	1.5	6.8	8.88	2.70
M8	7.78	8.00	1.25	2.5	0.15	0.60	14.38	0.40	1.8	9.2	11.63	3.61
M10	9.78	10.00	1.50	3.5	0.15	0.60	18.90	0.40	2.2	11.2	15.63	4.35
M12	11.73	12.00	1.75	4.0	0.15	0.60	21.10	0.60	2.6	13.7	17.37	5.12
M16	15.73	16.00	2.00	5.0	0.20	0.80	26.75	0.60	3.0	17.7	22.49	6.87
M20	19.67	20.00	2.50	7.0	0.20	0.80	33.53	0.80	3.5	22.4	28.19	8.60
M24	23.67	24.00	3.00	8.0	0.20	0.80	39.98	0.80	4.5	26.4	33.61	10.35
M30	29.67	30.00	3.50	8.0	0.20	0.80	50.85	1.00	5.2	33.4	42.75	12.80

	l mm	25	30	35	40	45	50	55	60	65	70	75	80	85-125	130-180	190-200	210-300
		± 0.42												± 0.70	± 0.80		± 0.92
M6	b																
M8	b																
M10	b																
M12	b																
M16	b																
M20	b																
M24	b																
M30	b																




Not available in CBC Range



Only available in full thread

METRIC HEXAGON HEAD BOLTS

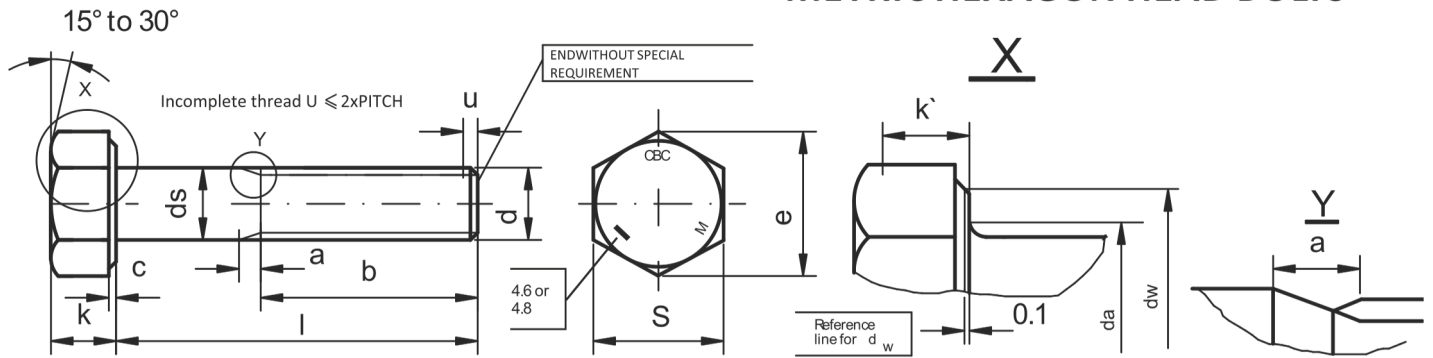

Dimensions for Bolt ISO 4016

Grade 4.6 and 4.8
Range M6 - M30

Dimensions in millimetres


d	S		k		
	min	max	min	nom	max
M6	9.64	10.00	3.62	4.00	4.37
M8	12.57	13.00	4.92	5.30	5.67
M10	15.57	16.00	5.95	6.40	6.85
M12	17.57	18.00	7.05	7.50	7.95
M16	23.16	24.00	9.25	10.00	10.75
M20	29.16	30.00	11.60	12.50	13.40
M24	35.00	36.00	14.10	15.00	15.90
M30	45.00	46.00	17.65	18.70	19.75

	ds		P	a	C		e	r	U	da	dw	k'
	min	max	lead	max	min	max	min	min	max	max	min	min
M6	5.82	6.00	1.00	2.0	0.15	0.50	10.89	0.25	1.5	7.20	8.74	2.54
M8	7.78	8.00	1.25	2.5	0.15	0.60	14.20	0.40	1.8	10.20	11.47	3.45
M10	9.78	10.00	1.50	3.5	0.15	0.60	17.59	0.40	2.2	12.20	14.47	4.17
M12	11.73	12.00	1.75	4.0	0.15	0.60	19.85	0.60	2.6	14.70	16.47	4.94
M16	15.73	16.00	2.00	5.0	0.20	0.80	26.17	0.60	3.0	18.70	22.00	6.48
M20	19.67	20.00	2.50	7.0	0.20	0.80	32.95	0.80	3.5	24.40	27.70	8.12
M24	23.67	24.00	3.00	8.0	0.20	0.80	39.55	0.80	4.5	28.40	33.25	9.87
M30	29.67	30.00	3.50	8.0	0.20	0.80	50.85	1.00	5.2	35.40	42.75	12.36

	l mm	25	30	35	40	45	50	55	60	65	70	75	80	85-125	130-180	190-200	210-300
		± 0.42												± 0.70	± 0.80		± 0.92
M6	b																
M8	b																
M10	b																
M12	b																
M16	b																
M20	b																
M24	b																
M30	b																

Not available in CBC Range

METRIC HEXAGON HEAD BOLTS

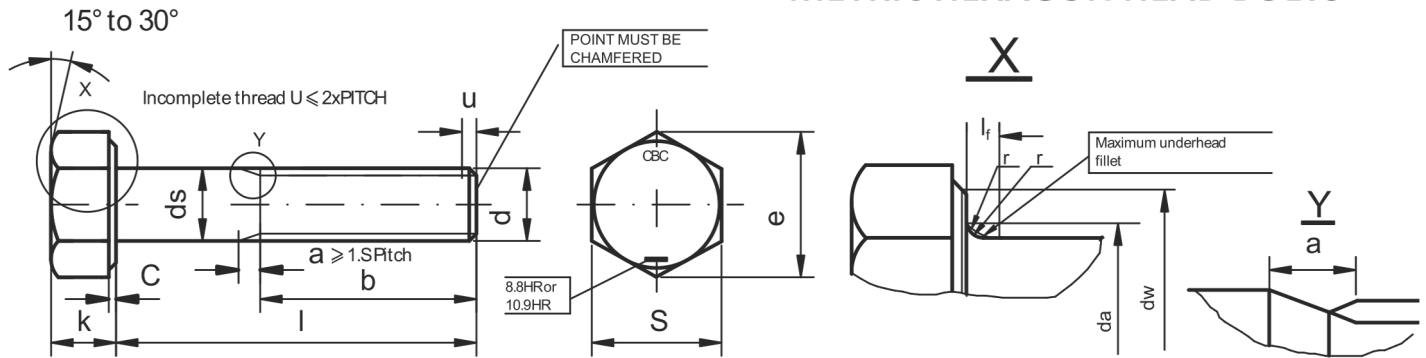

Dimensions for High Strength Bolt EN 14399-3, HR (British/French) Bolt (Replaces SABS 1282 + ISO 7411)

Grade 8.8S and 10.9S
Range M12 - M24

Dimensions in millimetres

DRAW SIZE			ROLLING SIZE		d	THREAD			S		K		
	MIN	MAX	MIN	MAX	MIN	NOM	MAX		MIN	MAX	MIN	NOM	MAX
M12	11.65	11.68	10.72	10.79	11.76	11.80	11.84		21.16	22.0	7.05	7.50	7.95
M16	15.62	15.66	14.52	14.60	15.72	15.76	15.80		26.16	27.0	9.25	10.00	10.75
M20	19.53	19.60	18.19	18.28	19.78	19.81	19.84		31.0	32.0	11.60	12.50	13.40
M24	23.56	23.60	21.84	21.94	23.75	23.78	23.82		40.0	41.0	14.10	15.0	15.90
M30			27.45	27.55	29.70	29.85	30.0		49.0	50.0	17.65	18.7	19.75

DS (SHANK)			P	a	c		e		r	lf	U	da	dw
	MIN	MAX	Pitch	MAX	MIN	MAX	MIN	MIN	MAX	MAX	MAX	MIN	MIN
M12	11.73	12.0	1.75	a.5	0.40	0.60	23.91	1.2	3	2.6	15.2	20.1	4.9
M16	15.73	16.0	2.00	4.0	0.40	0.60	29.56	1.2	3	3.0	19.2	24.9	6.5
M20	19.67	20.0	2.50	5.0	0.40	0.80	35.03	1.5	4	3.5	24.4	29.5	6.5
M24	23.67	24.0	3.00	6.0	0.40	0.80	45.20	1.5	4	4.5	28.4	38.0	9.9
M30	29.16	30.6	3.50	7.0	0.40	0.80	55.37	2.0	5	5.5	35.4	46.6	12.4


		35	40	45	50	55	60	65	70	75	80	85	90	95	100-125	130-180
Mm		+/- 0.5				+/- 0.6				+/- 0.7				+/- 0.8		
M12	b	23.8	28.8	30 + 3.5												
M16	b	Threaded ref: CBC 038B								38 +4.0						
M20	b	Threaded ref: CBC 038B								46 + 5.0						
M24	B	Threaded ref: CBC 038B														

NOTE

Installation - Torque control method with lubrication following EN 14399-1. See [page 6](#).
Nuts for structural Bolting Assemblies Pre-loading to be EN14399-3.

 Not available in CBC Range

METRIC HEXAGON HEAD BOLTS

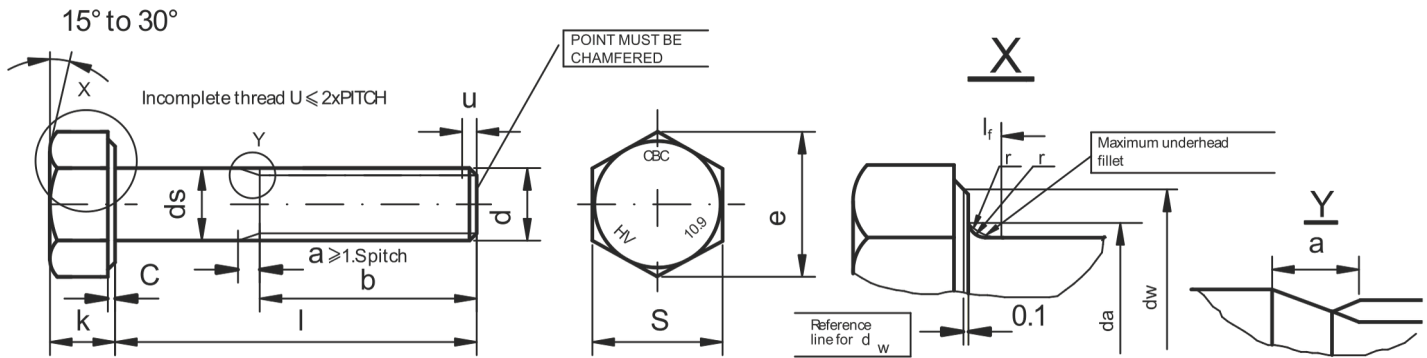

Dimensions for High Strength Bolt EN 14399-4 HV (German Bolt) (Replaces DIN 6914)

Grade 10.9

Range M12 - M30

Dimensions in millimetres

d	S		k		
	min	max	min	nom	max
M12	21.16	22.02	7.55	8.00	8.45
M16	26.16	27.00	9.25	10.00	10.75
M20	31.00	32.00	12.10	13.00	13.90
M24	40.00	41.00	14.10	15.00	15.90
M30	49.00	50.00	17.95	19.00	20.05

	ds		P	a	C		e	r	l _f	U	da	dw
	min	max	lead	max	min	max	min	min	max	max	max	min
M12	11.73	12.00	1.75	3.5	0.4	0.6	23.91	1.2	3.0	2.6	15.20	20.1
M16	15.73	16.00	2.00	4.0	0.4	0.6	29.56	1.2	3.0	3.0	19.20	24.9
M20	19.67	20.00	2.50	5.0	0.4	0.8	35.03	1.5	4.0	3.8	24.00	29.5
M24	23.67	24.00	3.00	6.0	0.4	0.8	45.20	1.5	4.0	4.5	28.00	38.0
M30	29.67	30.00	3.50	7.0	0.4	0.8	55.37	2.0	5.0	5.5	35.00	46.6

	l mm	25	30	35	40	45	50	55	60	65	70	75	80	90	100-125	130-150	160-280
		± 1.05			± 1.25					± 1.50				± 1.75		± 2.00	± 4.00
M12	b																
M16	b																
M20	b																
M24	b																
M30	b																


NOTE

Installation - Torque control method with lubrication following EN 14399-1. See [page 6](#).

Nuts for structural Bolting Assemblies Preloading to be EN 14399-4.

Not available in CBC Range

METRIC HEXAGON HEAD SCREWS

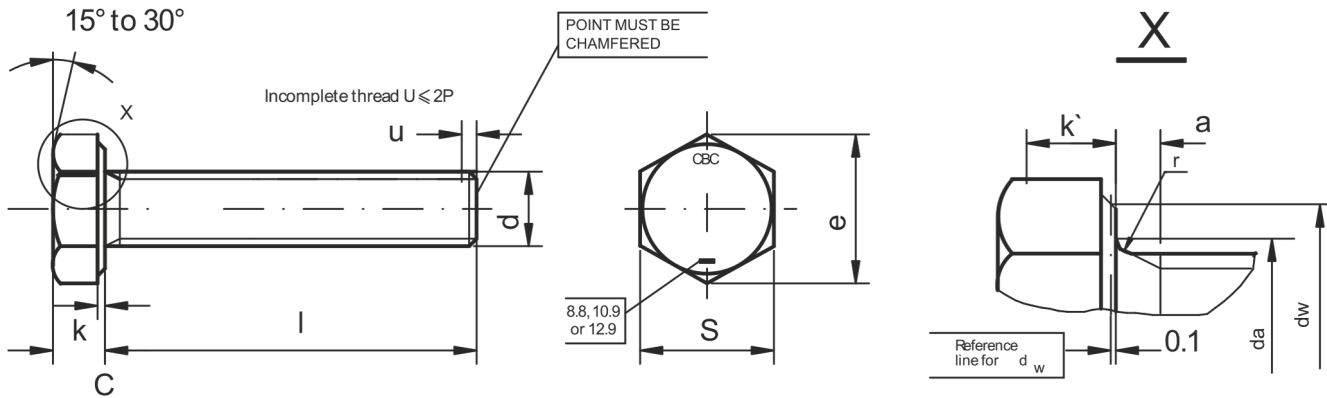

Dimensions for Screw (Set) DIN 933 (SABS 136)

Grade 8.8, 10.9 and 12.9
Range M6 - M30

Dimensions in millimetres

► Specifications differences between
DIN 933 and ISO 4017

NOTE

This specification has been superseded by ISO 4017. However, market preference dictates the continued use of this specification.


d	S		k		
	min	max	min	nom	max
M6	9.78	10.00	3.85	4.00	4.15
M8	12.73	13.00	5.15	5.30	5.45
M10	▶ 16.73	▶ 17.00	6.22	6.40	6.58
M12	▶ 17.67	▶ 19.00	7.32	7.50	7.68
M14	▶ 21.67	▶ 22.00	8.62	8.80	8.98
M16	23.67	24.00	9.82	10.00	10.18
M18	26.67	27.00	11.28	11.50	11.72
M20	29.67	30.00	12.29	12.50	12.71
M22	▶ 31.61	▶ 32.00	13.78	14.00	14.22
M24	35.38	36.00	14.79	15.00	15.21
M30	45.00	46.00	18.44	18.70	18.96

	P	a		C		e	r	U	da	dw	k'
	lead	min	max	min	max	min	min	max	max	min	min
M6	1.00	1.00	2.00	0.15	0.50	11.05	0.25	1.5	6.8	8.88	2.70
M8	1.25	1.25	2.50	0.15	0.60	14.38	0.40	1.8	9.2	11.63	3.61
M10	1.50	1.50	3.50	0.15	0.60	▶ 18.90	0.40	2.2	11.2	▶ 15.63	4.35
M12	1.75	1.75	4.00	0.15	0.60	▶ 21.10	0.60	2.6	13.7	▶ 17.37	5.12
M14	2.00	2.00	4.50	0.15	0.60	▶ 24.49	0.60	3.0	15.7	▶ 20.37	6.03
M16	2.00	2.00	5.00	0.20	0.80	26.75	0.60	3.0	17.7	22.49	6.87
M18	2.50	2.50	6.00	0.20	0.80	30.14	0.60	3.0	20.2	25.30	7.90
M20	2.50	2.50	7.00	0.20	0.80	33.53	0.80	3.5	22.4	28.19	8.60
M22	2.50	3.00	7.00	0.20	0.80	▶ 35.72	0.80	4.0	24.4	▶ 30.03	9.60
M24	3.00	3.00	8.00	0.20	0.80	39.98	0.80	4.5	26.4	33.61	10.35
M30	3.50	3.50	10.00	0.20	0.80	50.85	1.00	5.2	33.4	42.75	12.80

	L _{mm}	12-14	16-18	20	25-28	30	35-50	55-60	65-80	90	100	110-120
		± 0.35		± 0.42		± 0.50		± 0.60		± 0.70		
M6	tolerance											
M8												
M10												
M12												
M14												
M16												
M18												
M20												
M22												
M24												
M30												

Not available in CBC Range

METRIC HEXAGON HEAD SCREWS

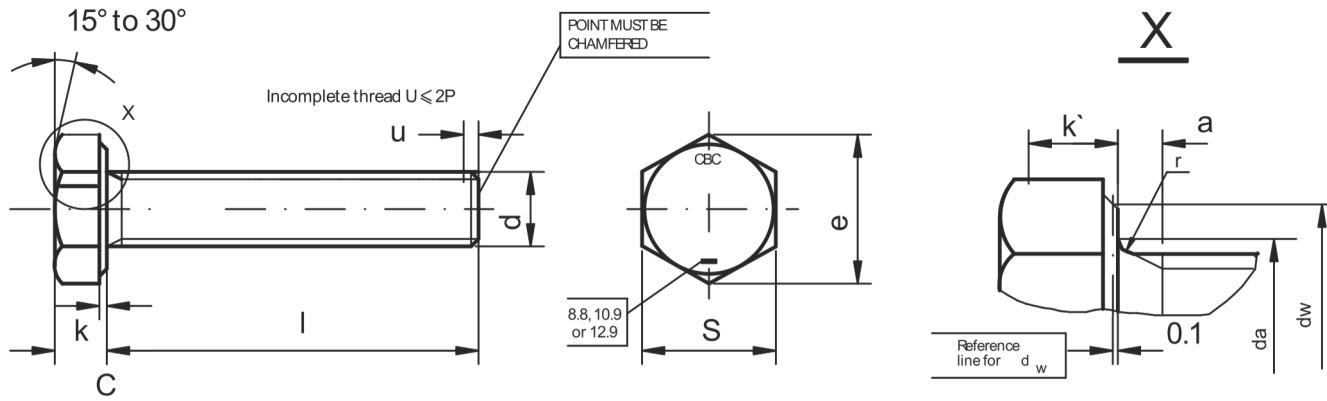

Dimensions for Screw (Set) ISO 4017

Grade 8.8, 10.9 and 12.9
Range M6 - M30

Dimensions in millimetres

✦ Specifications differences between
ISO 4017 and DIN 933


d	S		k		
	min	max	min	nom	max
M6	9.78	10.00	3.85	4.00	4.15
M8	12.73	13.00	5.15	5.30	5.45
M10	✦ 15.73	✦ 16.00	6.22	6.40	6.58
M12	✦ 17.73	✦ 18.00	7.32	7.50	7.68
M14	✦ 20.67	✦ 21.00	8.62	8.80	8.98
M16	23.67	24.00	9.82	10.00	10.18
M18	26.67	27.00	11.28	11.50	11.71
M20	29.67	30.00	12.29	12.50	12.71
M22	✦ 33.38	✦ 34.00	13.78	14.00	14.21
M24	35.38	36.00	14.79	15.00	15.21
M30	45.38	46.00	18.44	18.70	18.96

	P	a		C		e	r	U	da	dw	k'
	lead	min	max	min	max	min	min	max	max	min	min
M6	1.00	1.00	2.00	0.15	0.50	11.05	0.25	1.5	6.8	8.88	2.70
M8	1.25	1.25	2.50	0.15	0.60	14.38	0.40	1.8	9.2	11.63	3.61
M10	1.50	1.50	3.50	0.15	0.60	✦ 17.77	0.40	2.2	11.2	✦ 14.63	4.35
M12	1.75	1.75	4.00	0.15	0.60	✦ 20.03	0.60	2.6	13.7	✦ 16.63	5.12
M14	2.00	2.00	4.50	0.15	0.60	✦ 23.36	0.60	3.0	15.7	✦ 19.37	6.03
M16	2.00	2.00	5.00	0.20	0.80	26.75	0.60	3.0	17.7	22.49	6.87
M18	2.50	2.50	6.00	0.20	0.80	30.14	0.60	3.0	20.2	25.30	7.80
M20	2.50	2.50	7.00	0.20	0.80	33.53	0.80	3.5	22.4	28.19	8.60
M22	2.50	2.50	7.00	0.20	0.80	✦ 37.72	0.80	3.5	24.4	✦ 31.70	9.60
M24	3.00	3.00	8.00	0.20	0.80	39.98	0.80	4.5	26.4	33.61	10.35
M30	3.50	3.50	10.00	0.20	0.80	50.85	1.00	5.2	33.4	42.75	12.80

	L _{mm}	12-14	16-18	20	25-28	30	35-50	55-60	65-80	90	100	110-120
		± 0.35		± 0.42		± 0.50		± 0.60		± 0.70		
M6	tolerance											
M8												
M10												
M12												
M14												
M16												
M18												
M20												
M22												
M24												
M30												

Not available in CBC Range

METRIC HEXAGON HEAD SCREWS

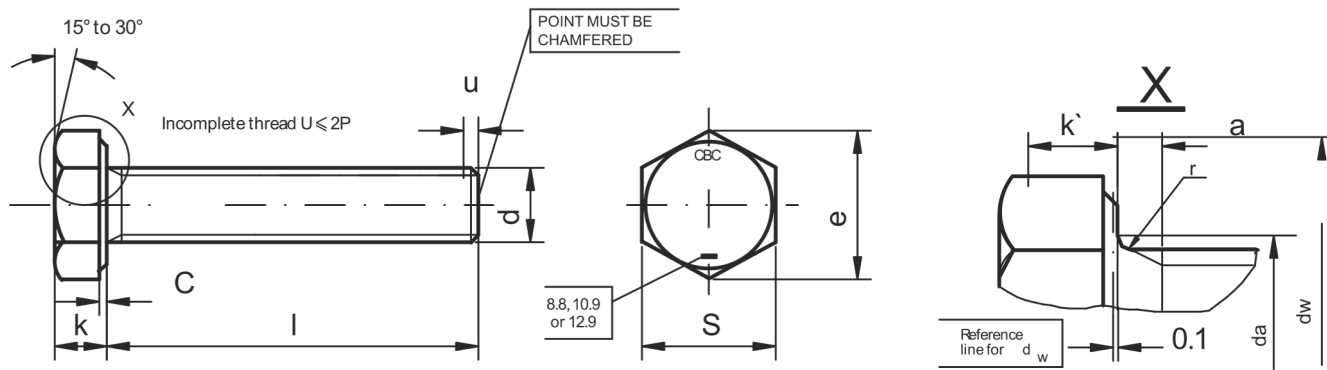

Dimensions for Screw (Set) DIN 961

Grade 8.8, 10.9 and 12.9
Range M8 - M24

Dimensions in millimetres

NOTE

This specification has been superseded by ISO 8676. However, market preference dictates the continued use of this specification.


d & pitch	S		k		
	min	max	min	nom	max
M8 x 1.00	12.73	13.00	5.15	5.30	5.45
M10 x 1.00 & 1.25	16.73	17.00	6.22	6.40	6.58
M12 x 1.25 & 1.50	18.67	19.00	7.32	7.50	7.68
M14 x 1.50	21.67	22.00	8.62	8.80	8.98
M16 x 1.50	23.67	24.00	9.82	10.00	10.18
M20 x 1.50 & 2.00	29.67	30.00	12.29	12.50	12.72
M24 x 1.50 & 2.00	35.38	36.00	14.79	15.00	15.22

	a		C		e	r	U	da	dw	k'
	min	max	min	max	min	min	max	max	min	min
M8	1.25	2.50	0.15	0.60	14.38	0.4	1.8	9.2	11.63	3.61
M10	1.50	3.50	0.15	0.60	18.90	0.4	2.2	11.2	15.63	4.35
M12	1.75	4.00	0.15	0.60	21.10	0.6	2.6	13.7	17.37	5.12
M14	2.00	4.50	0.15	0.60	24.49	0.6	3.0	15.7	20.50	6.03
M16	2.00	5.00	0.20	0.80	26.75	0.6	3.0	17.7	22.49	6.87
M20	2.50	7.00	0.20	0.80	33.53	0.8	3.5	22.4	28.19	8.60
M24	3.00	8.00	0.20	0.80	39.98	0.8	4.5	26.4	33.61	10.35

	L mm	12-14	16-18	20	25-28	30	35-50	55-60	65-80	90	100	110-120
		± 0.35		± 0.42		± 0.50		± 0.60		± 0.70		
M8	tolerance											
M10												
M12												
M14												
M16												
M20												
M24												

Not available in CBC Range

METRIC HEXAGON HEAD SCREWS

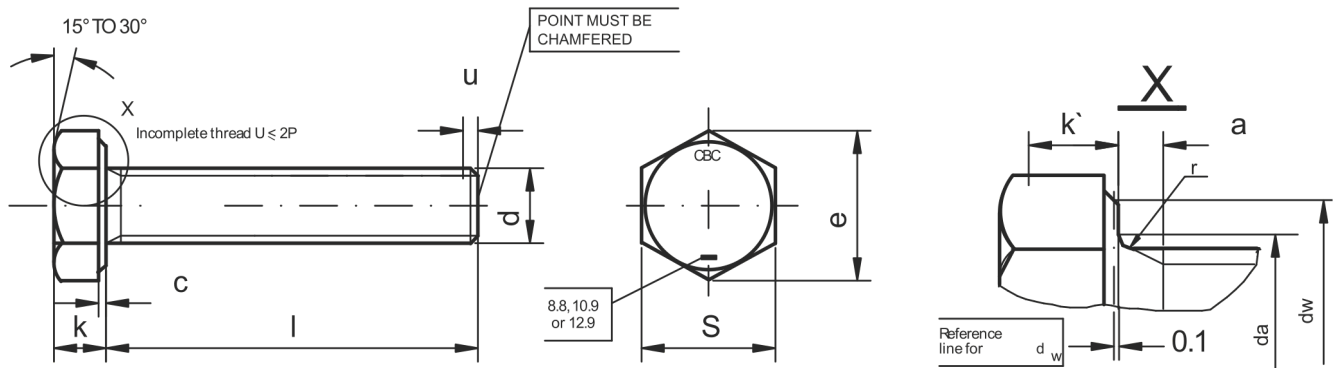

Dimensions for Screw (Set) ISO 8676

Grade 8.8, 10.9 and 12.9
Range M8 - M24

Dimensions in millimetres


d & pitch	S		k		
	min	max	min	nom	max
M8 x 1.00	12.73	13.00	5.15	5.30	5.45
M10 x 1.00 & 1.25	15.73	16.00	6.22	6.40	6.58
M12 x 1.25 & 1.50	17.73	18.00	7.32	7.50	7.68
M14 x 1.50	20.67	21.00	8.62	8.80	8.98
M16 x 1.50	23.67	24.00	9.82	10.00	10.18
M20 x 1.50 & 2.00	29.67	30.00	12.29	12.50	12.72
M24 x 1.50 & 2.00	35.38	36.00	14.79	15.00	15.22

	a		C		e	r	U	da	dw	k'
	min	max	min	max	min	min	max	max	min	min
M8	1.25	2.50	0.15	0.60	14.38	0.4	1.8	9.2	11.63	3.61
M10	1.50	3.50	0.15	0.60	17.77	0.4	2.2	11.2	14.63	4.35
M12	1.75	4.00	0.15	0.60	20.03	0.6	2.6	13.7	16.63	5.12
M14	2.00	4.50	0.15	0.60	23.36	0.6	3.0	15.7	19.37	6.03
M16	2.00	5.00	0.20	0.80	26.75	0.6	3.0	17.7	22.49	6.87
M20	2.50	7.00	0.20	0.80	33.53	0.8	3.5	22.4	28.19	8.60
M24	3.00	8.00	0.20	0.80	39.98	0.8	4.5	26.4	33.61	10.35

	L _{mm}	12-14	16-18	20	25-28	30	35-50	55-60	65-80	90	100	110-120
		± 0.35		± 0.42		± 0.50		± 0.60		± 0.70		
M8	tolerance											
M10												
M12												
M14												
M16												
M20												
M24												

 Not available in CBC Range

METRIC HEXAGON HEAD SCREWS

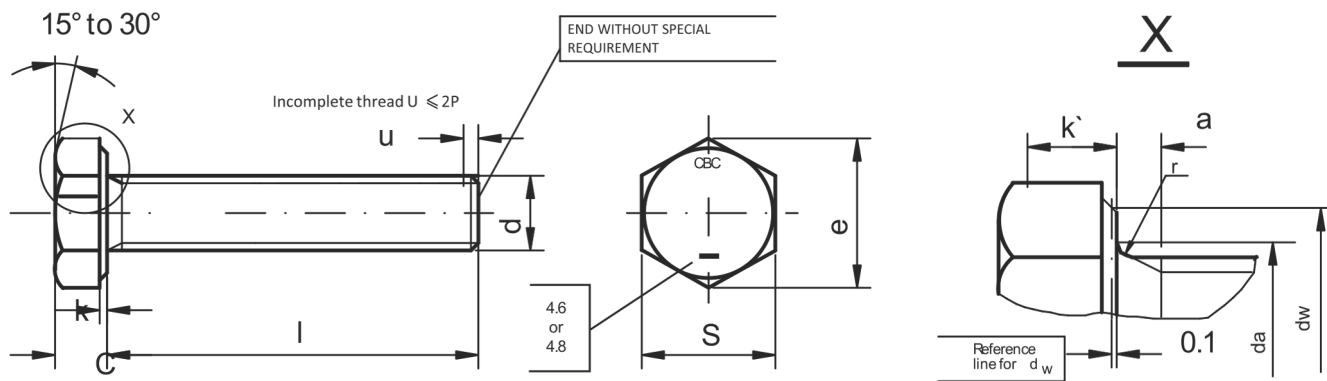

Dimensions for Screw (Set) DIN 558

Grade 4.6, 4.8, 5.6, 5.8 and 6.8
Range M6 - M24

Dimensions in millimetres

NOTE

This specification has been superseded by ISO 4018. However, market preference dictates the continued use of this specification.


d	S		k		
	min	max	min	nom	max
M6	9.78	10.00	3.85	4.00	4.15
M8	12.73	13.00	5.15	5.30	5.45
M10	16.73	17.00	6.22	6.40	6.58
M12	18.67	19.00	7.32	7.50	7.68
M14	21.67	22.00	8.62	8.80	8.98
M16	23.67	24.00	9.82	10.00	10.18
M20	29.67	30.00	12.29	12.50	12.71
M24	35.38	36.00	14.79	15.00	15.21

	P	a		C		e	r	U	da	dw	k'
	lead	min	max	min	max	min	min	max	max	min	min
M6	1.00	1.00	2.00	0.15	0.50	11.05	0.25	1.5	6.8	8.88	2.70
M8	1.25	1.25	2.50	0.15	0.60	14.38	0.40	1.8	9.2	11.63	3.61
M10	1.50	1.50	3.50	0.15	0.60	18.90	0.40	2.2	11.2	15.63	4.35
M12	1.75	1.75	4.00	0.15	0.60	21.10	0.60	2.6	13.7	17.37	5.12
M14	2.00	2.00	4.50	0.15	0.60	24.49	0.60	3.0	15.7	20.37	6.03
M16	2.00	2.00	5.00	0.20	0.80	26.75	0.60	3.0	17.7	22.49	6.87
M20	2.50	2.50	7.00	0.20	0.80	33.53	0.80	3.5	22.4	28.19	8.60
M24	3.00	3.00	8.00	0.20	0.80	39.98	0.80	4.5	26.4	33.61	10.35

	L _{mm}	12-14	16-18	20	25-28	30	35-50	55-60	65-80	90	100	110-120
		± 0.35		± 0.42		± 0.50		± 0.60		± 0.70		
M6	tolerance											
M8												
M10												
M12												
M14												
M16												
M20												
M24												

Not available in CBC Range

METRIC HEXAGON HEAD SCREWS

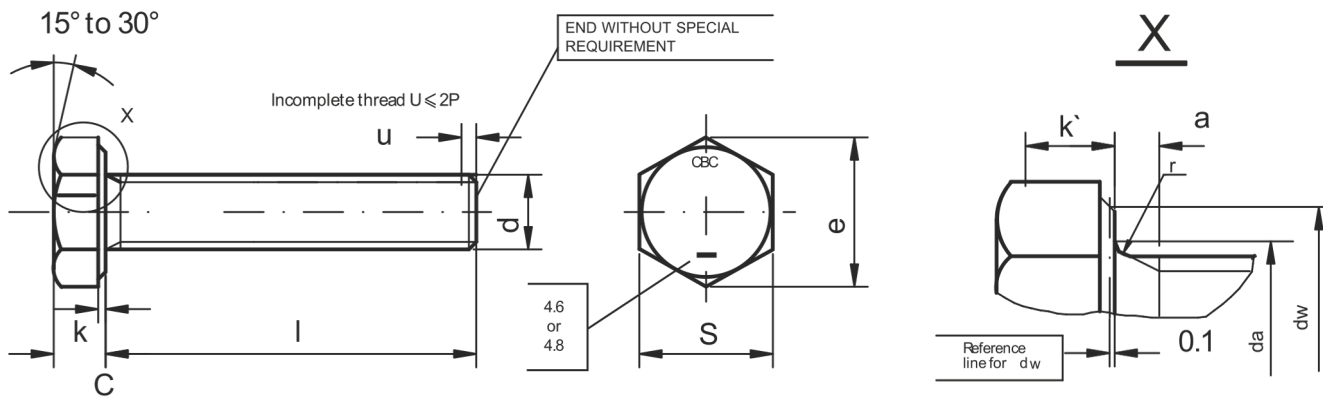

Dimensions for Screw (Set) ISO 4018

Grade 4.6 and 4.8
Range M6 - M24

Dimensions in millimetres


d	S		k		
	min	max	min	nom	max
M6	9.64	10.00	3.62	4.00	4.37
M8	12.57	13.00	4.92	5.30	5.67
M10	15.57	16.00	5.95	6.40	6.85
M12	17.57	18.00	7.05	7.50	7.95
M16	23.16	24.00	9.25	10.00	10.75
M20	29.16	30.00	11.60	12.50	13.40
M24	35.00	36.00	14.10	15.00	15.90

	P	a		C		e	r	U	da	dw	k'
	lead	min	max	min	max	min	min	max	max	min	min
M6	1.00	1.00	2.00	0.15	0.50	10.89	0.25	1.5	7.20	8.74	2.54
M8	1.25	1.25	2.50	0.15	0.60	14.20	0.40	1.8	10.20	11.47	3.45
M10	1.50	1.50	3.50	0.15	0.60	17.59	0.40	2.2	12.20	14.47	4.17
M12	1.75	1.75	4.00	0.15	0.60	19.85	0.60	2.6	14.70	16.47	4.94
M16	2.00	2.00	5.00	0.20	0.80	26.17	0.60	3.0	18.70	22.00	6.48
M20	2.50	2.50	7.00	0.20	0.80	32.95	0.80	3.5	24.40	27.70	8.12
M24	3.00	3.00	8.00	0.20	0.80	39.55	0.80	4.5	28.40	33.25	9.87

	L _{mm}	12-14	16-18	20	25-28	30	35-50	55-60	65-80	90	100	110-120
		± 0.35		± 0.42		± 0.50		± 0.60		± 0.70		
M6	tolerance											
M8												
M10												
M12												
M14												
M16												
M20												
M24												

Not available in CBC Range

METRIC ROUND HEAD BOLTS

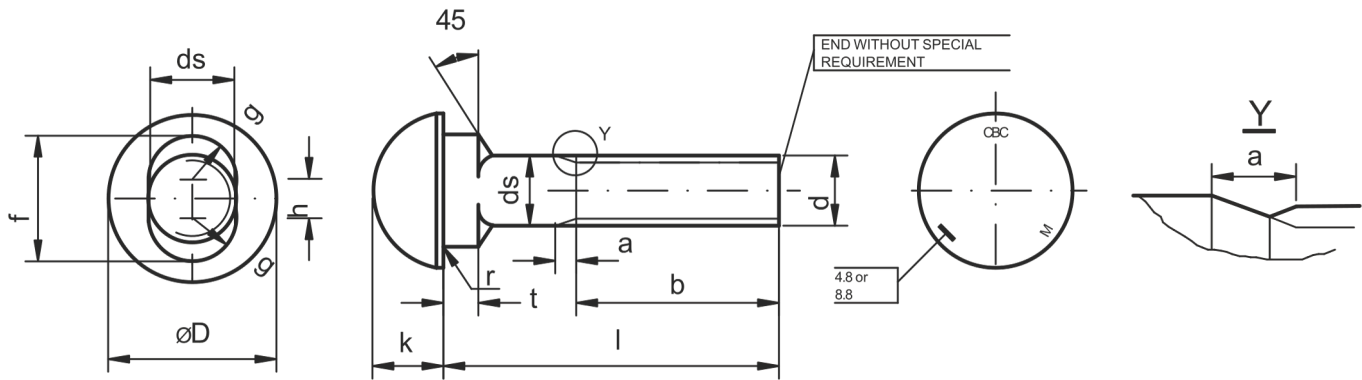

Dimensions for Cup Oval SABS 916

Grade 4.8 and 8.8
Range M12 - M20


Dimensions in millimetres

d	D		k	
	min	max	min	max
M12	20.3	21.6	8.5	9.6
M16	27.5	28.8	11.7	12.8
M20	34.4	36.0	14.9	16.0

	d_s		P	a	t		r		f		h	g
	min	max	lead	max	min	max	min	max	min	max	nom	nom
M12	11.73	12.00	1.75	4.0	5.5	7.0	0.8	1.1	16.0	17.5	4.5	6.0
M16	15.73	16.00	2.00	5.0	7.5	9.0	0.8	1.1	21.5	23.0	6.0	8.0
M20	19.67	20.00	2.50	7.0	9.5	11.0	1.0	1.5	25.5	27.0	6.0	10.0

	l mm	I < 125
		± 0.70
M12 x 50	b	30 + 3.5
M16 x 60	b	38 + 4.0
M20 x 65	b	38 + 5.0
M20 x 75	b	46 + 5.0
M20 x 90	b	46 + 5.0
M20 x 100	b	46 + 5.0

METRIC ROUND HEAD BOLTS

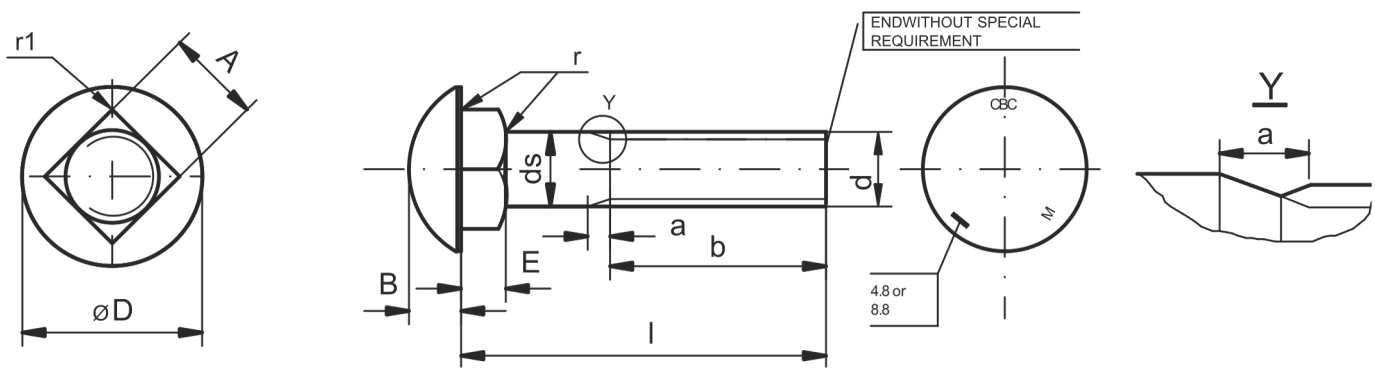

Dimensions for Cup Squares SABS 1143

Grade 4.8 and 8.8
Range M6 - M16

Dimensions in millimetres


d	D		B	
	min	max	min	max
M6	12.4	13.5	3.0	3.6
M8	16.9	18.0	4.0	4.8
M10	21.2	22.5	5.0	5.8
M12	25.7	27.0	6.0	6.8
M16	34.4	36.0	8.0	8.9

	ds		P	a	E		r1	r		A	
	min	max	lead	max	min	max	~	min	max	min	max
M6	5.24	6.00	1.00	2.0	3.0	3.6	0.9	0.3	0.4	5.52	6.48
M8	7.78	8.00	1.25	2.5	4.0	4.8	1.2	0.3	0.8	7.78	8.58
M10	9.78	10.00	1.50	3.5	5.0	5.8	1.5	0.3	0.8	9.78	10.58
M12	11.73	12.00	1.75	4.0	6.0	6.8	1.8	0.3	1.3	11.73	12.70
M16	15.73	16.00	2.00	5.0	8.0	8.9	2.4	0.3	1.3	15.73	16.70

	L mm	20-30	35-50	55-80	90-125
		± 0.42	± 0.50	± 0.60	± 0.70
M6	b				
M8	b				
M10	b				
M12	b				
M16	b				

Not available in CBC Range

METRIC ROUND HEAD BOLTS

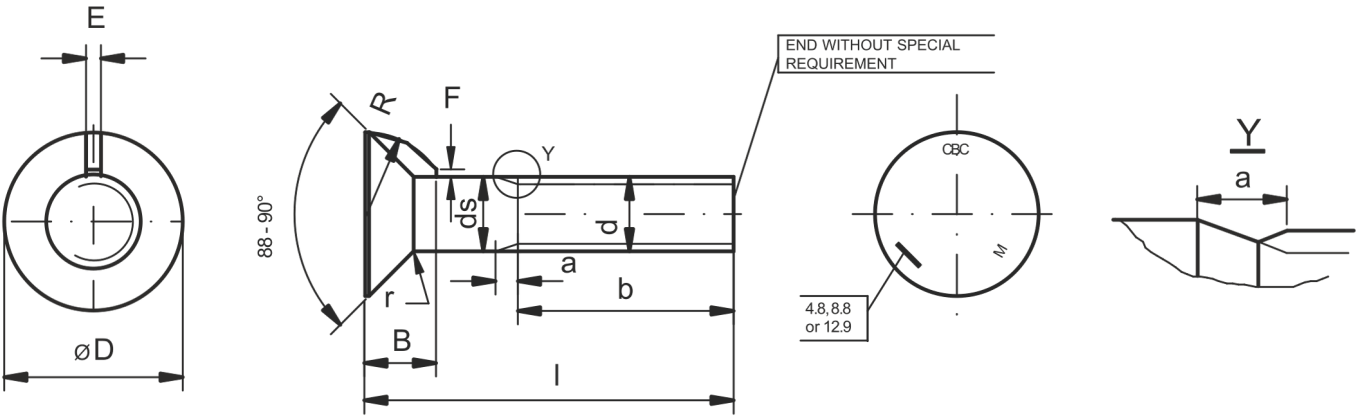

Dimensions for Nib Bolts SABS 1143

Grade 4.8, 8.8 and 12.9
Range M10 - M20

Dimensions in millimetres


d	D		B	
	min	max	min	max
M10	17.0	20.0	5.1	6.3
M12	20.4	24.0	6.2	7.5
M16	27.2	32.0	8.3	10.0
M20	34.0	40.0	10.4	12.5

	ds		P	a	E		r	F	R
	min	max	lead	max	min	max	max	~	~
M10	9.78	10.00	1.50	3.5	2.1	2.5	0.8	1.25	8.0
M12	11.73	12.00	1.75	4.0	2.6	3.0	1.3	1.50	10.0
M16	15.73	16.00	2.00	5.0	3.5	4.0	1.3	2.00	13.0
M20	19.67	20.00	2.50	7.0	4.5	5.0	1.8	2.50	16.0

	mm	25	30	35	40	45	50	55	60	65	70	75	80	85-125	
		+/- 0.42		+/- 0.50				+/- 0.60						+/- 0.70	
M10	b						26 + 3.0								
M12	b						30 + 3.5								
M16	b						38 + 4.0								
M20	b						46 + 5.0								

Not available in CBC Range

METRIC ROUND HEAD BOLTS

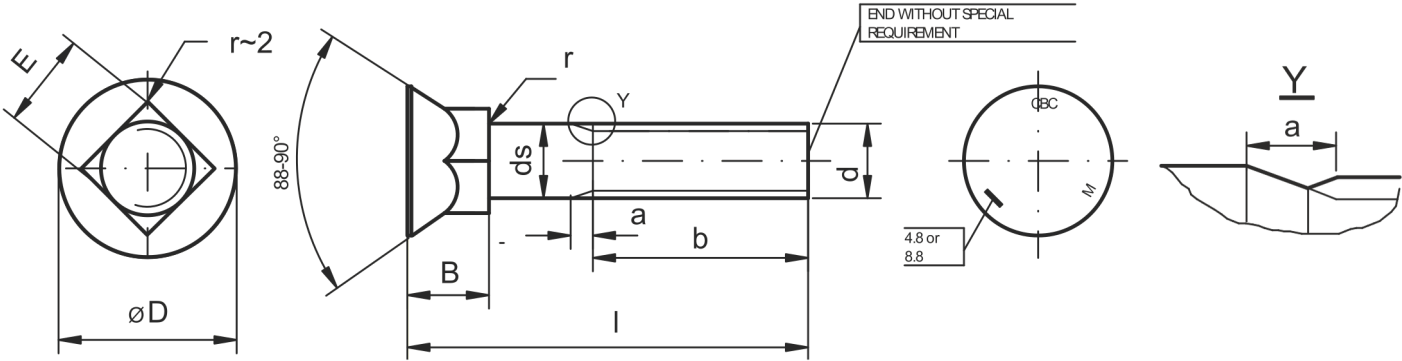

Dimensions for Square Neck (Plough) Bolts SABS 1143

Grade 4.8 and 8.8
Range M10 - M16

Dimensions in millimetres




d	D		B	
	min	max	min	max
M10	17.0	20.0	6.0	7.5
M12	20.4	24.0	7.2	9.0
M16	27.2	32.0	9.6	12.0

	ds		P	a	E		r
	min	max	lead	max	min	max	~
M10	9.78	10.00	1.50	3.5	9.78	10.58	0.8
M12	11.73	12.00	1.75	4.0	11.73	12.70	1.3
M16	15.73	16.00	2.00	5.0	15.73	16.70	1.3

		25	30	35	40	45	50	55	60	65	70	75	80	85-125	
	mm	+/- 0.42		+/- 0.50				+/- 0.60					+/- 0.70		
M10	b					26 + 3.0									
M12	b						30 + 3.5								
M16	b							38 + 4.0							

Not available in CBC Range

METRIC HEXAGON NUTS

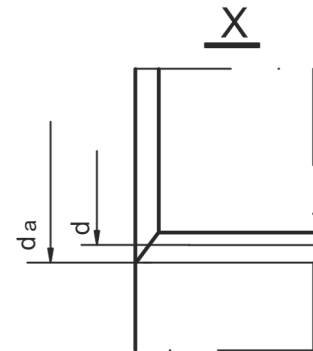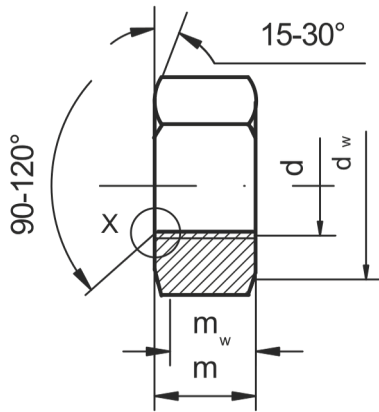

Dimensions for Nut DIN 934

Range M5 - M30

Dimensions in millimetres




NOTE This specification has been superseded by ISO 4032. However, market preference dictates the continued use of this specification.

	P	e	bore dia.		d _a		d _w	S		m		m _w
		min	min	max	min	max	min	min	max	min	max	min
M5	0.80	8.79	4.13	4.34	5.00	5.75	6.8	7.78	8.00	3.70	4.00	2.96
M6	1.00	11.05	4.92	5.15	6.00	6.75	8.8	9.78	10.00	4.70	5.00	3.76
M8	1.25	14.38	6.45	6.91	8.00	8.75	11.3	12.73	13.00	6.14	6.50	4.91
M10	1.50	18.90	8.38	8.67	10.00	10.80	15.3	16.73	17.00	7.64	8.00	6.11
M12	1.75	21.10	10.11	10.44	12.00	13.00	17.2	18.67	19.00	9.64	10.00	7.71
M14	2.00	24.49	11.79	12.24	14.00	15.10	20.2	21.67	22.00	10.30	11.00	8.24
M16	2.00	26.75	13.84	14.21	16.00	17.30	22.2	23.67	24.00	12.30	13.00	9.84
M20	2.50	32.95	17.30	17.74	20.00	21.60	28.2	29.16	30.00	14.90	16.00	11.92
M24	3.00	39.55	20.75	21.38	24.00	25.90	33.2	35.00	36.00	17.70	19.00	14.16
M30	3.50	50.85	26.29	26.74	30.00	32.40	42.7	45.00	46.00	22.70	24.00	18.16

Class |8| for Range M5 - M30

Class |10| - on demand

METRIC HEXAGON NUTS

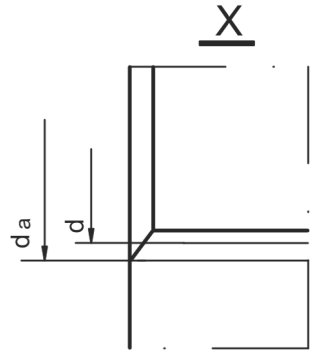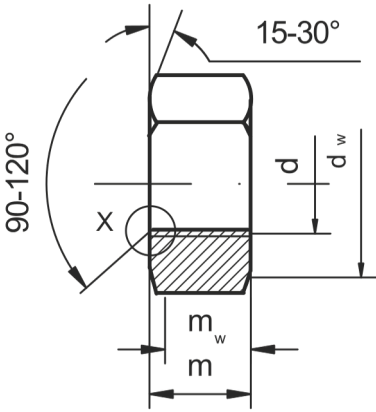

Dimensions for Nut ISO 4032


Range M6 - M30

Dimensions in millimetres

	P	e	bore dia.		da		dw	S		m		m _w
		min	min	max	min	max	min	min	max	min	max	min
M6	1.00	11.05	4.92	5.15	6.00	6.75	8.9	9.78	10.00	4.90	5.20	3.90
M8	1.25	14.38	6.45	6.91	8.00	8.75	11.6	12.73	13.00	6.44	6.80	5.20
M10	1.50	17.77	8.38	8.67	10.00	10.80	14.6	15.73	16.00	8.04	8.40	6.40
M12	1.75	20.03	10.11	10.44	12.00	13.00	16.6	17.73	18.00	10.37	10.80	8.30
M14	2.00	23.36	11.79	12.24	14.00	15.10	19.6	20.67	21.00	12.10	12.80	9.70
M16	2.00	26.75	13.84	14.21	16.00	17.30	22.5	23.67	24.00	14.10	14.80	11.30
M20	2.50	32.95	17.30	17.74	20.00	21.60	27.7	29.16	30.00	16.90	18.00	13.50
M24	3.00	39.55	20.75	21.38	24.00	25.90	33.3	35.00	36.00	20.20	21.50	16.20
M30	3.50	50.85	26.29	26.74	30.00	32.40	42.8	45.00	46.00	24.30	25.60	19.40

Class 8 for Range M6 - M30

Class 10 - on demand

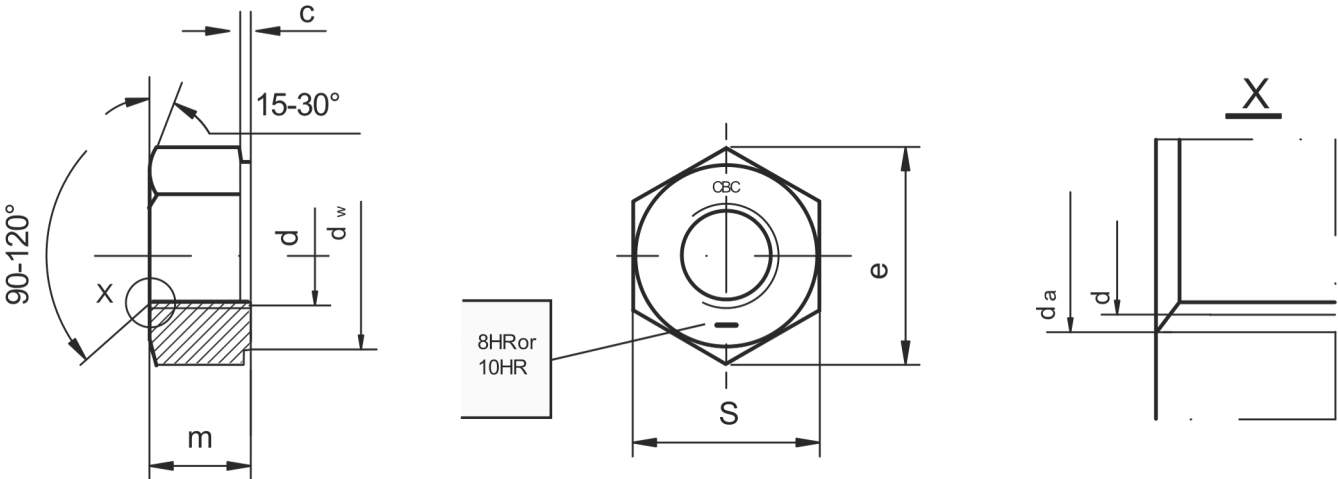

**Dimensions for High Structural Nut
EN 14399-3 HR (British/French Nut)
Replaces SABS 1282 + ISO 4775**


Range M12 - M30
Grade 8 and 10

Dimensions in millimetres

	P	e	bore dia.		c		dw	S		m	
		min	min	max	min	max	min	min	max	min	max
M12	1.75	23.91	10.11	10.44	0.4	0.8	20.10	21.16	22.00	10.37	10.80
M16	2.00	29.56	13.84	14.21	0.4	0.8	24.90	26.16	27.00	14.10	14.80
M20	2.50	35.03	17.30	17.74	0.4	0.8	29.50	31.00	32.00	16.90	18.00
M24	3.00	45.20	20.75	21.38	0.4	0.8	38.00	40.00	41.00	20.20	21.50
M30	3.50	55.37	26.29	26.74	0.4	0.8	46.60	49.00	50.00	24.30	25.60

NOTE
Installation - Torque control method with lubrication following EN 14399. See [page 6](#).
Nuts for structural Bolting Assemblies Preloading to be EN14399-3.

METRIC HEXAGON NUTS

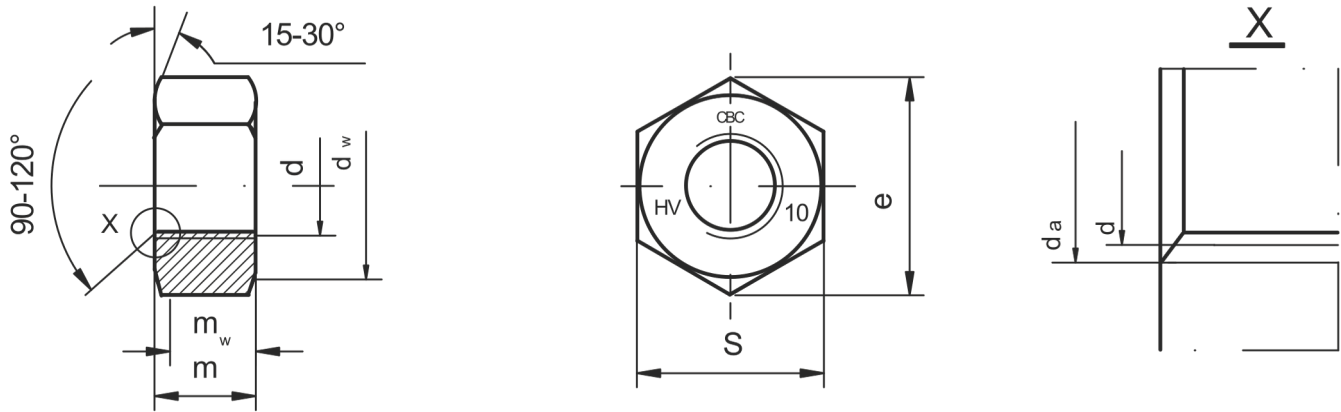

Dimensions for High Structural Nut EN 14399-4 (HV German Nut) Replaces DIN 6915

Range M16 - M30

Grade 10

Dimensions in millimetres

	P	e	bore dia.		da		dw	S		m		m _w
		min	min	max	min	max	min	min	max	min	max	min
M16	2.00	29.56	13.84	14.21	16.00	17.30	24.9	26.16	27.00	12.30	13.00	9.84
M20	2.50	35.03	17.30	17.74	20.00	21.60	29.5	31.00	32.00	14.90	16.00	11.92
M24	3.00	45.20	20.75	21.38	24.00	25.90	38.0	40.00	41.00	18.70	20.00	14.96
M30	3.50	55.37	26.29	26.74	30.00	32.40	46.6	49.00	50.00	22.70	24.00	18.16

NOTE


Installation - Torque control method with lubrication following EN 14399. See [page 6](#).

Nuts for structural Bolting Assemblies Preloading to be EN 14399-4.

WASHERS

Dimensions for Washers DIN 126 Range for Bolts M6-M72

Dimensions in millimetres

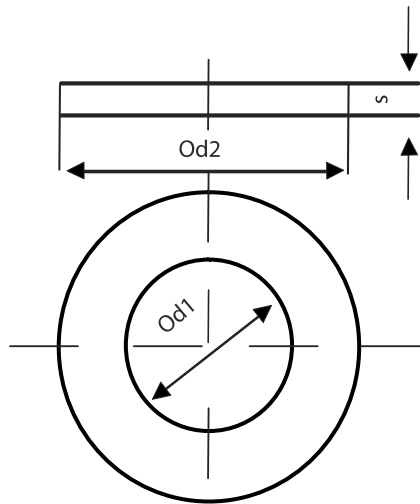

d1	d2	s	For metric bolts
6.6	12.5	1.6	6
7.6	14.0	1.6	7
9.0	17.0	1.6	8
11.0	21.0	2.0	10
14.0	24.0	2.5	12
16.0	28.0	2.5	14
18.0	30.0	3.0	16
20.0	34.0	3.0	18
22.0	37.0	3.0	20
24.0	39.0	3.0	22
26.0	44.0	4.0	24
30.	50.0	4.0	27
33.0	56.0	4.0	30
36.0	60.0	5.0	33
39.0	66.0	5.0	36
42.0	72.0	6.0	39
45.0	78.0	7.0	42
48.0	85.0	7.0	45
52.0	92.0	8.0	48
56.0	98.0	8.0	52
62.0	105.0	9.0	56
66.0	110.0	9.0	60
70.0	115.0	9.0	64
78.0	125.0	10.0	72



Mission Statement

We aim to better our position as the leading manufacturer and warehouse distributor of fasteners in South Africa, by providing our customers with value for money, quality products and timeous service. We will also provide a working environment that is safe and happy and where employees have mutual respect for each other.

DIGITAL
VERSION

2020

CBC FASTENERS (PTY) LTD

6 Coppinger Street
Factoria
Krugersdorp - Mogale City

P.O. Box 670
Paardekraal
1752
South Africa

Tel: +27 11 767 0000

EST.
1988



CBC
FASTENERS

PROUDLY HOLDING INDUSTRY TOGETHER

ISO 9001:2015
MANAGEMENT SYSTEM

MSECB
CERTIFIED



www.cbc.co.za